

BFS BULLET FLOODLIGHT (1/2" Knuckle Mount)

DESCRIPTION

naturaLED® Bullet Flood light (BFS) delivers exceptional illumination performance to landscape and security lighting. Our Bullet Flood light provides beam angle distribution of 40°, rated IP65, and comes with 1/2" NPT knuckle mount. Creating bright, security and spot lighting for a variety of applications such as perimeter, entryway, facades, landscapes, retail and residential complexes and architectural lighting.



Rated Life 50,000 Hours
Warranty 5 Years

APPLICATIONS

Security, Architectural, Perimeter, Entryway, Pathway, Landscape

FEATURES

- Energy Star
- IP65 Rated
- ETL Listed
- ColorTemp: 3000K, 4000K, 5000K
- Voltage: 120-277V
- Powerfactor >0.9
- Surge Protection: 2KV
- Beam Angle: 40°
- CRI: 80
- Voltage Frequency (Hz): 50/60
- Operating temperature: -22°F - 122°F
- Long life LED chips
- 1/2" NPT threaded knuckle mount
- Material: Aluminum die-cast housing
- Color: Bronze
- 5 Year Warranty

SAMPLE NUMBER LED-FXBFS10/40/830/BZ-KNC

STYLE	SERIES	FAMILY	WATTAGE	BEAM ANGLE	COLOR TEMP	COLOR	ACCESSORY
LED	FX	BFS	10	40	830	BZ	KNC
LED Lighting	Fixture	Bullet Floodlight	10 Watt	40°	CRI 80 3000K	Bronze	1/2" Knuckle



BULLET FLOODLIGHT


FLOODLIGHTS & AREA LUMINAIRES

ORDERING

Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Equiv. Wattage (W)	Knuckle	IP65 Rated	Energy Star
10	9291	LED-FXBFS10/40/830/BZ-KNC	3000K	900	100	1/2"	•	•
10	9295	LED-FXBFS10/40/840/BZ-KNC	4000K	900	100	1/2"	•	•
10	9292	LED-FXBFS10/40/850/BZ-KNC	5000K	900	100	1/2"	•	•
21	9293	LED-FXBFS20/40/830/BZ-KNC	3000K	1,800	150	1/2"	•	•
21	7045	LED-FXBFS20/40/840/BZ-KNC	4000K	1,800	150	1/2"	•	•
21	9294	LED-FXBFS20/40/850/BZ-KNC	5000K	1,800	150	1/2"	•	•


DIMENSIONS

10W / 21W
1.50-lbs

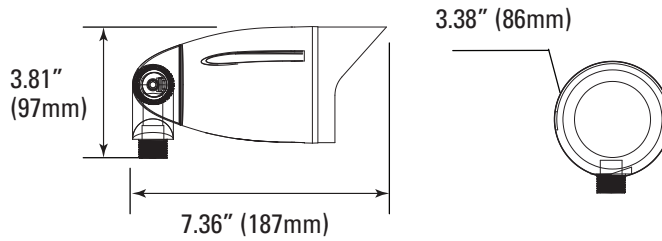

PHOTOMETRICS CHART


10 Watt
Energy Star



Center Beam Fc	Beam Width
2.0R	2.15 Fc 2.2 R 2.2 R
5.0R	5.37 Fc 4.4 R 4.5 R
7.5R	23.9 Fc 6.6 R 6.7 R
10.0R	13.4 Fc 8.7 R 9.0 R
12.5R	8.60 Fc 10.9 R 11.2 R
15.0R	5.97 Fc 13.1 R 13.4 R

Vert. Spread: 47.2°
Hori. Spread: 40.3°

21 Watt
Energy Star



Center Beam Fc	Beam Width
2.0R	4.20 Fc 2.2 R 2.2 R
5.0R	10.5 Fc 4.3 R 4.4 R
7.5R	46.7 Fc 6.5 R 6.5 R
10.0R	26.3 Fc 8.6 R 8.7 R
12.5R	16.8 Fc 10.8 R 10.9 R
15.0R	11.7 Fc 12.9 R 13.1 R

Vert. Spread: 46.6°
Hori. Spread: 47.1°

PACKAGE

Case Qty 10 pcs

