



## LED PL : DIRECT REPLACEMENT LAMPS

### DESCRIPTION

LED PL Replacement Lamps directly replace fluorescent PL lamps at a fraction of the energy cost.

### FEATURES


- Plug-and-play installation for 4-pin G24Q and GX24Q bases
- Lasts 5x longer than compact fluorescent lamps
- Consumes up to 1/3 the energy of conventional CFL
- Base rotates for precision orientation once installed in fixture
- Shatter-resistant for reduced risk of injury and breakage
- Instant-on with no warmup, unlike CFLs
- 9W G24Q replaces 26-42W CFL
- Suitable for use in 6" cans
- Non-dimmable
- **Not compatible with all ballasts. See eiko.com for list of tested ballasts**

### WARRANTY

- 5 year limited warranty; see eiko.com for warranty details

### APPLICATIONS

- Commercial/Residential
- Hotel/Hospitality
- Education
- Healthcare
- Retail
- Property Management

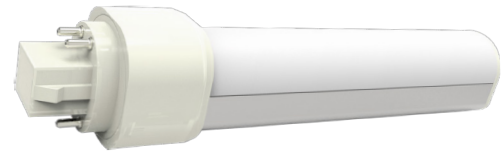

G24Q base  
Horizontal



G24Q base  
Vertical



<b>PERFORMANCE</b>	Power Consumption	9W
	Lumens	900/950/1,000
	Efficacy (LPW)	100/106/111
	CRI	80+
	Beam	140°
	CCT	2700K, 3000K, 3500K, 4000K
	Life (L70)	50,000 hours
<b>ELECTRICAL</b>	Power Factor	≥0.9
	THD	<20%
	Input Voltage	120-277V
	Operating Temperature	-4°F to 113°F (-20°C to 45°C)
<b>CONSTRUCTION</b>	Base	G24Q; GX24Q
<b>LISTINGS</b>	Certification(s)	DesignLights Consortium® Qualified; cULus Classified
	Material Usage	RoHS Compliant; no mercury or lead
	Environment	UL/cUL Classified for damp locations; Enclosed fixture rated

## PERFORMANCE SUMMARY

Order Code	Item #	Lumens	Watts	CCT	CRI	MOL	Orientation	Base	Beam	Life/Hours	Replaces Fluor	DLC
09938	LED9W4PH/827DR-G7	900	9W	2700K	80+	6.65"	Horizontal	G24Q/GX24Q	140°	50K	26-42W CFL	✓
09901	LED9W4PH/830DR-G7	950	9W	3000K	80+	6.65"	Horizontal	G24Q/GX24Q	140°	50K	26-42W CFL	✓
09902	LED9W4PH/835DR-G7	950	9W	3500K	80+	6.65"	Horizontal	G24Q/GX24Q	140°	50K	26-42W CFL	✓
09903	LED9W4PH/840DR-G7	1,000	9W	4000K	80+	6.65"	Horizontal	G24Q/GX24Q	140°	50K	26-42W CFL	✓
09939	LED9W4PV/827DR-G7	900	9W	2700K	80+	4.69"	Vertical	G24Q/GX24Q	140°	50K	26-42W CFL	✓
09940	LED9W4PV/830DR-G7	950	9W	3000K	80+	4.69"	Vertical	G24Q/GX24Q	140°	50K	26-42W CFL	✓
09925	LED9W4PV/835DR-G7	950	9W	3500K	80+	4.69"	Vertical	G24Q/GX24Q	140°	50K	26-42W CFL	✓
09926	LED9W4PV/840DR-G7	1,000	9W	4000K	80+	4.69"	Vertical	G24Q/GX24Q	140°	50K	26-42W CFL	✓

NOTE: Use order code when ordering. Not for use with emergency ballasts. ✓ DesignLights Consortium® Qualified  
Visit [eiko.com](http://eiko.com) for complete ballast compatibility information.

## DIMENSIONS

