



# T8

## 15.5T8/MAS/48-850/IF25/P/DIM 25/1

Our TLEDs are available in InstantFit (Type A / Type C) or MainsFit (Ballast bypass / Type B) versions. The InstantFit lamps work on a broad variety of ballasts and LED drivers. Only InstantFit has over 15,000 lamp & ballast combinations delivering even light output, energy savings and a long lifetime. Our MainsFit products feature a double-ended design, simplifying installation while a proprietary safety circuit minimizes a shock risk. Lamp sizes range from 2-foot to 8-foot and U-bend with a variety of lumen outputs.

### Product data

General information	
Cap-Base	G13 [ Medium Bi-Pin Fluorescent]
EU RoHS compliant	Yes
Nominal Lifetime (Nom)	70000 h
Switching Cycle	50000
Technical Type	LEDTECH-LOV
Tier	MasterClass
Light technical	
Color Code	850 [ CCT of 5000K]
Beam Angle (Nom)	180 °
Luminous Flux (Nom)	2500 lm
Color Designation	Daylight
Correlated Color Temperature (Nom)	5000 K
Luminous Efficacy (rated) (Nom)	161 lm/W
Color Consistency	<5
Color Rendering Index (Nom)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %

Operating and electrical	
Input Frequency	20K to 120K Hz
Power (Nom)	15.5 W
Lamp Current (Max)	320 mA
Lamp Current (Min)	60 mA
Wattage Equivalent	32 W
Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s
UL Type	TLED_Type A; UL listed HF
Power Factor (Nom)	0.9
Voltage (Nom)	120-277,347 V
Temperature	
T-Ambient (Max)	55 °C
T-Ambient (Min)	-20 °C
T-Storage (Range)	-40 °C to 65 °C
T-Storage (Max)	65 °C
T-Storage (Min)	-40 °C
T-Case Maximum (Nom)	40 °C

# T8

## Controls and dimming

Dimmable	Only with specific dimmers
----------	----------------------------

## Mechanical and housing

Bulb Finish	Frosted
Bulb Material	Plastic
Product Length	1200 mm
Bulb Shape	Tube, double-ended

## Approval and application

Energy Saving Product	Yes
Approval Marks	RoHS compliance UL certificate DLC compliance
Energy Consumption kWh/1000 h	- kWh


## Application conditions

Ambient temperature range	-20 °C to 55 °C
---------------------------	-----------------

## Product data

Order product name	15.5T8/MAS/48-850/IF25/P/DIM 25/1
EAN/UPC - Product	046677545208
Order code	929002016504
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material Nr. (12NC)	929002016504
Net Weight (Piece)	0.165 kg


## Dimensional drawing

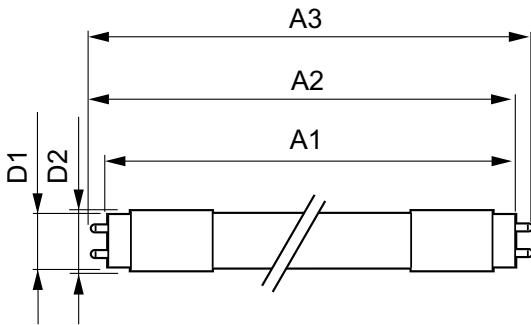


15.5T8/MAS/48-850/IF25/P/DIM 25/1

Product	D1	D2	A1	A2	A3
15.5T8/MAS/48-850/IF25/P/DIM 25/1	25.7 mm	28 mm	1198.1 mm	1205.2 mm	1212.3 mm

## Photometric data

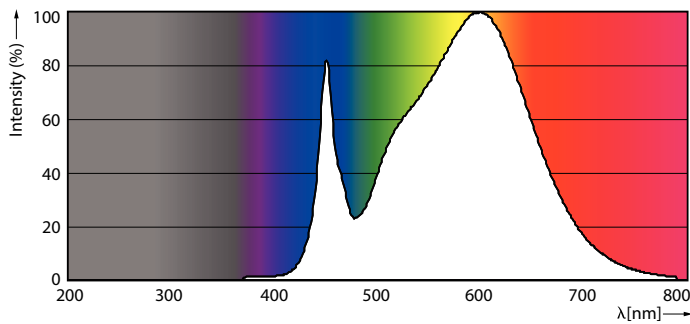


LEDtube 15,5W G13 T8 850




LEDtube 15,5W G13 T8 850

Photometric data

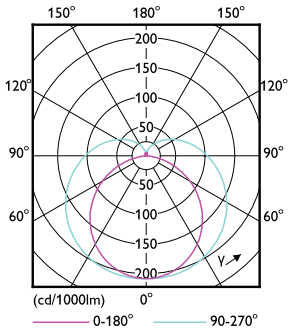


LEDtube 15,5W G13 T8


Lifetime

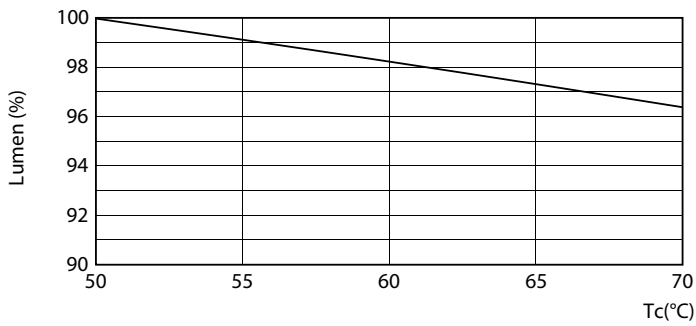


LEDtube 15,5W G13 T8 LumenVsTc

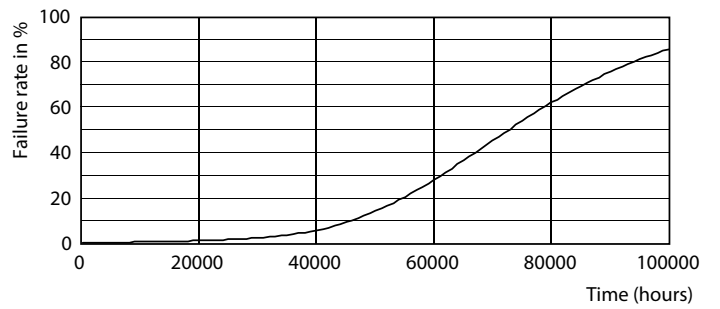

LEDtube 15,5W G13 T8

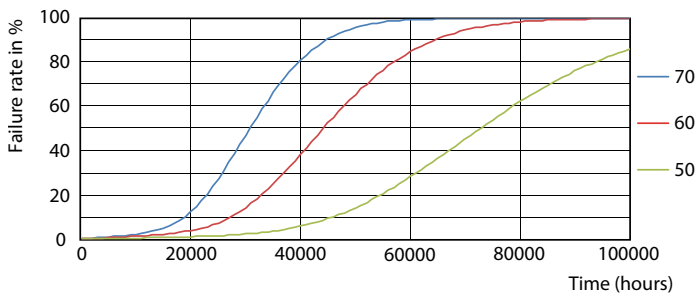


LEDtube 15,5W G13 T8 FailureRate

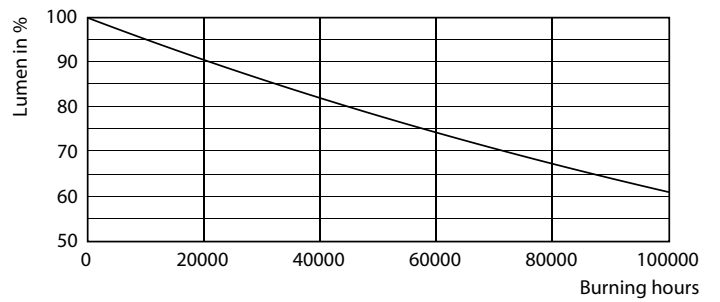

LEDtube 15,5W G13 T8

# T8

## Lifetime

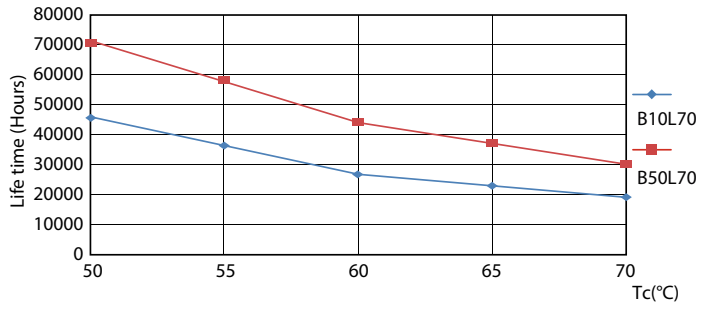

LEDtube 15,5W G13 T8 LifetimeVsTc

