

# High Output UV Air Duct Disinfection 4-Lamp Fixture - UV-C - Destroys Airborne Bacteria & Viruses - 24" x 24" Air Duct Mount

IND-HVAC-CDW-R3-SS-18-4L-24.24-XB



This unit is Made In USA - Manufactured in Texas
IND-HVAC-CDW-R3-SS-18-4L-24.24-XB High Output UV Air Duct Disinfection System Ratings/Features

Lamp Technology: UV-C Fluorescent

Lamp Quantity: (4) 18"

Ballast Box Dimensions: 30.00"W x 30.00"H Lamp Frame Assembly Dimensions: -Compatible Duct Size: 24" x 24"

Weight: -

Voltage: 120V AC, 50/60 Hz or 240V AC, 50/60 Hz

Total Watts: 60W Single-lamp Watts: 15W Total UV Output: 21.2W Single-lamp UV Output: 5.3W

UV Irradiance: 176 μW/cm<sup>2</sup> @ 1 Meter Expected Lifespan: 8,000+ Hours UV Wavelength: 254nm

Lamp Type: T8

Lamp Base: G13 (Medium Bi-pin)

Replacement Lamp: -Beam Angle: 180° Light Configuration: Flood

Amps: -

**Ambient Operating Temp Range: -**Materials: 304 Stainless Steel External Ballast Box: Yes

Mounting: Inside 24" x 24" Air Duct

\*\*\*PLEASE NOTE: UV-C light can cause temporary or permanent loss of vision, and temporary acute redness or ulceration (mild to severe sunburn) to exposed skin. To prevent exposure, do not operate the device in any application that allows UV-C light to be visible during operation. NEVER LOOK DIRECTLY AT THE BULB OR DISINFECTING TARGET ZONE. DO NOT touch bulb with bare hands. The oils in your skin will damage the lamp. Fingerprints will result in reduced performance and significantly reduce the lifespan of the lamp unless they are removed with alcohol. Please read instruction manual for UV safety requirements before operating.\*

NRTL Listed to UL 508A NRTL Listed to CSA C22.2 No. 14

T8 Bulb Shape

Short-wave Germicidal Light

Destroys Airborne Bacteria and Viruses

### **Special Orders - Requirements**

Contact us for special requirements

Toll Free: 1-800-369-6671 Intl: 1-214-616-6180 Fax: 1-903-498-3364

E-mail: sales@larsonelectronics.com

### This unit is Made In USA - Manufactured in Texas

The IND-HVAC-CDW-R3-SS-18-4L-24.24-XB from Larson Electronics is a High Output Air Duct Disinfection System that works to disinfect air

moving through a 24" x 24" duct system via germicidal ultraviolet (UV) rays. This unit helps to control the spread of airborne cold and flu virus as well as other airborne transmitted diseases. The anodized aluminum air duct disinfection system features four UV bulbs that each produce 5.3 watts of UV output at a wavelength of 254nm. The IND-HVAC-CDW-R3-SS-18-4L-24.24-XB is designed to be mounted inside an 24" x 24" air duct, is equipped with an external ballast box, and operates on 120V AC or 240V AC current.

\*\*\*PLEASE NOTE: UV-C light can cause temporary or permanent loss of vision, and temporary acute redness or ulceration (mild to severe sunburn) to exposed skin. To prevent exposure, do not operate the device in any application that allows UV-C light to be visible during operation. NEVER LOOK DIRECTLY AT THE BULB OR DISINFECTING TARGET ZONE. DO NOT touch bulb with bare hands. The oils in your skin will damage the lamp. Fingerprints will result in reduced performance and significantly reduce the lifespan of the lamp unless they are removed with alcohol. Please read instruction manual for UV safety requirements before operating. UVC light in the proper setting kills up to 99.9% of viruses, mold, spores and bacteria. Click here to learn more about UVC and the corona virus\*


The IND-HVAC-CDW-R3-SS-18-4L-24.24-XB is a powerful sanitation solution for industrial sites and commercial facilities. Equipped with four UVC fluorescent lamps, this system offers 21.2 total watts of UV output at a wavelength of 254nm. The lights have an expected lifespan of 8,000+ hours and emit a flood beam pattern. The IND-HVAC-CDW-R3-SS-18-4L-24.24-XB can be used continuously in 24" x 24" air ducts such as those found in HVAC systems and is constructed from stainless steel.

**Operation:** This high output UV air duct disinfection system projects ultraviolet rays inside the air duct it is mounted in. The air flowing through the duct that passes through the UV rays is then sanitized. Bacteria and viruses present in the air that passes through the UV rays produced by the fixture are destroyed. The air moving through the duct is constantly being purified as it flows through the UV rays being produced by the fixture.

**Mounting:** The IND-HVAC-CDW-R3-SS-18-4L-24.24-XB is designed to be mounted inside an 24"  $\times$  24" air duct. The system is equipped with an external ballast box. The lamp frame attaches easily to the inside of the properly sized air duct and the ballast box is mounted outside of the duct.

**Note on Environment:** Sunlight and visible light fixtures do not impact the effectiveness of the disinfecting on this UVC sanitation product. Metal halide, high pressure sodium, fluorescent, and LED light fixtures can be left on. The UV radiation emitted from this product is not disrupted by any type of lighting in the environment. Put simply, NO it DOES NOT need to be dark in the area you plan to disinfect. The UV radiation is harmful to the eyes and skin, and that is why you should not be in the area while it is in operation. Please see user manual for additional safety information.

**Applications:** This ultraviolet UV air duct disinfection system can be used to continuously disinfect air of mold, allergens, airborne bacteria, viruses, and germs. The IND-HVAC-CDW-R3-SS-18-4L-24.24-XB is ideal for use in restaurants, hospitals, clinics, laboratories, nursing homes, schools, food processing facilities, office buildings, conference rooms, universities, clean rooms, and many more. Larson Electronics is a manufacturer and as such can build stationary and portable transformer systems to your specifications. Although we carry several models of power distribution transformer systems, we can deliver custom ordered units almost as quickly as our prebuilt units. If this model does not meet your needs, please contact us at 1-800-369-6671 or <a href="mailto:sales@larsonelectronics.com">sales@larsonelectronics.com</a> to discuss your specific requirements.

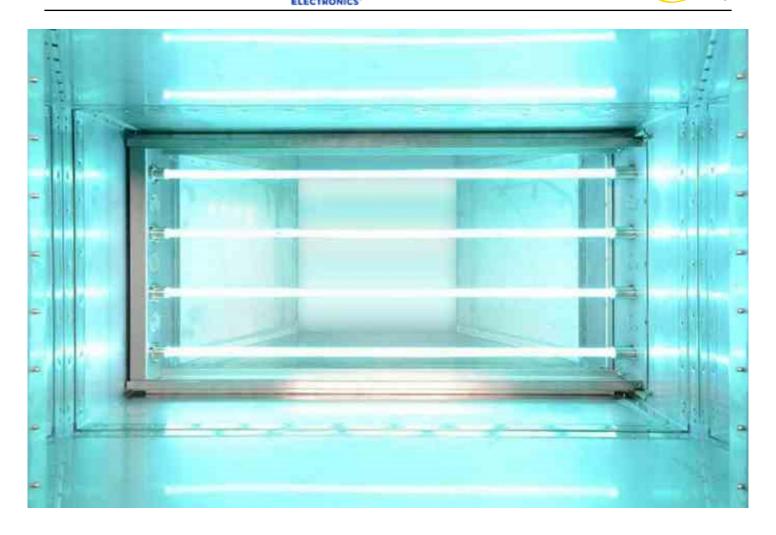





## **Options:**

IND-HVAC-CDW-R3-SS-18-4L-24.24-XB-Voltage

Example: IND-HVAC-CDW-R3-SS-18-4L-24.24-XB-120V

Voltage	
120V AC	-120V
240V AC	-240V



Links (Click on the below items to view):

- addpic1large
- addpic2large
- BeamInfo
- CatalogPage
- large
- LightingFacts
- medium
- MSDS
- HigResPic1
- HigResPic2
- HigResPic3
- Video1
- Video4
- CECCert
- Cert1
- EyeSafety
- NECCert