


The CT700E Series offers a contemporary slim profile steel housing design ideal for commercial and institutional installations utilizing the ADA Compliant, State of Connecticut required, modified accessibility symbol. This series features high intensity red or green LED's providing bright and uniform illumination, while offering durability and strength in a 20 gauge steel enclosure.

**FEATURES & BENEFITS**

- Meets State of Connecticut Emergency Building Code requirements (Para. 1011.1.2)
- Face includes "EXIT" legend with the ADA compliant, modified accessibility symbol
- Ceiling, end or wall mounted
- Constructed of rugged 20 gauge steel

**SPECIFICATIONS**

- Illumination:** Long-life, high-intensity, red or green LEDs.
- Housing:** Rugged 20 gauge steel with power coated finish.
- Input:** 120/277VAC dual primary, 60Hz.
- Battery:** Maintenance-free NiCad battery.
- Operating Temp:** 0°C to 40°C (32°F to 104°F)
- Run Time:** CSA Listed 90 minute emergency run time, 24 hour recharge time.
- Electrical:** Brownout Protection  
Low Voltage Disconnect  
Overload and Short Circuit Protection
- Legend:** Fully-illuminated 6" characters with 3/4" stroke and field-selectable directional chevrons.
- Mounting:** Ceiling, end or wall mounted, canopy included.
- Finishes:** Black or White
- Certifications:** CSA listed and meets or exceeds the following: UL 924, NEC requirements and NFPA 101. Specifically designed to meet the requirements of the State of Connecticut, Building Code paragraph 1011.1.2. Assembled in the USA with global components. American Recovery and Reinvestment Act (ARRA) compliant.
- Warranty:** Any component that fails due to a manufacturing defect is guaranteed for five years with a separate five year prorated warranty on the battery. The warranty does not cover physical damage, abuse or instances of uncontrollable natural forces. See the full Exitronix warranty document for detailed information.

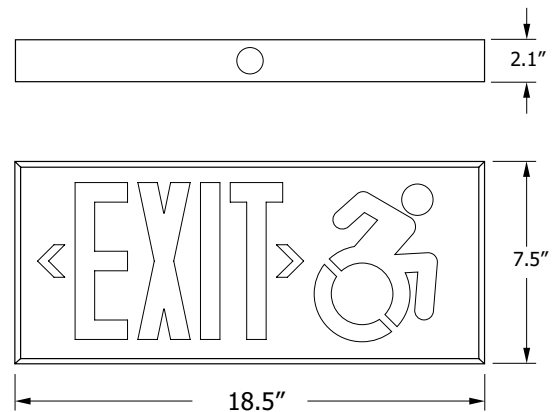

## ORDERING INFORMATION Example: CT703E-WB-WH

Series	Power Source	Finish
CT702E = Red Single Face	LB = AC Only	BL = Black
CT703E = Red Double Face	WB = With Battery	WH = White
GCT702E = Green Single Face		
GCT703E = Green Double Face		<b>Notes</b>
CT700E <sup>1</sup> = Red Universal		<sup>1</sup> Includes (2) faceplates, back plate and mounting canopy
GCT700E <sup>1</sup> = Green Universal		

### CONSTRUCTION

The CT700E series exit is constructed of 20 gauge steel. Universal chevron knockouts are concealed and easily removed. All units are supplied with mounting canopy for ceiling, end or wall mounting. Finish options include white or black powder coat.

Stencil letters and ADA compliant modified accessibility symbol are 6" high with 3/4" stroke, with minimum of 100 ft viewing distance rating as required by UL 924 standard.

### ILLUMINATION

Illumination of the CT700E series is accomplished utilizing high-intensity, long-life red or green LEDs. LEDs provide excellent illumination while maximizing energy efficiency. As a maintenance-free solution, LEDs provide up to 100,000 hours of use without failure.

### ELECTRICAL

#### Input

Dual-voltage input 120 or 277VAC @ 60Hz.

#### Nickel Cadmium Battery – NiCad

Exitronix nickel cadmium batteries are maintenance-free and continue to perform optimally temperatures ranging from 0°C to 40°C (32°F to 104°F).

#### Emergency

The CT700E series exit will operate for a minimum of 90 minutes during a loss of power with a 24 hour maximum recharge time for the battery.

#### Brownout Circuit

Brownout circuit monitors the line voltage, as the line voltage sags and can no longer illuminate the exit sign to meet UL924 visibility test, the emergency circuit will turn on to supply a portion or all the power to illuminate the sign for a minimum of 90mins until the line voltage is restored.

#### Low Voltage Disconnect

When the battery's terminal voltage falls below predetermined levels, the low-voltage circuit disconnects the emergency lighting load. The disconnect remains in effect until normal power is restored, preventing deep battery discharge and improving the life of the battery. The disconnect will also automatically reconnect the load circuit once the battery voltage returns to a normal value after charging.

### Solid-State Transfer

The unit features a solid-state switching transistor which eliminates damaged contacts or mechanical failures associated with relays. The switching circuit is designed to detect a loss of AC power and automatically energizes the lamps. Upon restoration of the AC voltage, the emergency lamps will switch off and the charger will automatically recharge the battery.

### Overload and Short Circuit Protection

The solid-state overload monitoring system in the DC circuit disconnects the lamp load from the battery should excessive wattage demands be made and automatically resets when the overload or short circuit is removed. This overload current protective characteristic eliminates the need for fuses or circuit breakers for the DC load.

### Test Button

Our easily located test button allows for manual verification of proper operation of the transfer circuit and emergency lamps.

### INSTALLATION

Installs in minutes with easy-to read instructions and detailed diagrams. No special hardware or tools necessary. Internally housed components and battery.

### CONFORMANCE TO CODES & STANDARDS

The CT700E Series is CSA listed and meets or exceeds the following: UL 924, NEC requirements and NFPA 101. Specifically designed to meet the requirements of the State of Connecticut, Building Code paragraph 1011.1.2. American Recovery and Reinvestment Act (ARRA) compliant.