

# WALL PACK WP SERIES

# CONTRACTOR CHOICE

The Contractor Choice LED wall pack fixture combines high-efficiency with high-quality construction. The energy savings will have an immediate impact with as high as a 128 lumen to watt ratio when compare to a traditional HID lamp. This unit includes a built-in switch for on/off photocell, wattage (40/60/80/100% output), and color temperature (3000K/4000K/5000K).

## Features

- Includes built-in wattage selectable switch
  - WP-65W (28W - 41W - 55W - 65W)
  - CP-100W (39W - 62W - 88W - 100W)
- Includes built-in color selectable switch
  - CCT (3000K - 4000K - 5000K)
- Includes built-in photocell
- Optional 90min 8W emergency battery backup
- Die-cast housing UV resistant polycarbonate lens
- Dark bronze finish
- Standard 0-10V dimming driver
- Operating temperature of -40° to 104° F
  - Battery backup 50° to 104° F
- Wet location rated
- Universal 120-277V input voltage
- 50,000-hour rated life
  - based on IES LM-80 and TM-21 calculations
- 5-year manufacturer limited warranty
- DLC Premium
  - *Outdoor Non-Cutoff and Semi-Cutoff Wall-Mounted Area Luminaires*



## Order Code

**SKU: WP-65W-DDK-PC-EM**

Fixture Type	Adjustable Wattage	CCT (Adjustable Color Temp)	Photocell	Emergency Battery Backup
WP (Wall Pack)	65W (28W/41W/55W/65W) 100W (39W/62W/88W/100W)	DDK (3000K/4000K/5000K)	PC (Photocell)	Blank (No Battery Backup) EM (Battery Backup)

## Adjustable Lumen Output

WP-65W			WP-100W		
SETTING	WATTAGE	LUMENS (4000K)	SETTING	WATTAGE	LUMENS (4000K)
100%	65W	8350	100%	100W	12100
80%	55W	7200	80%	88W	11100
60%	41W	5650	60%	62W	8550
40%	28W	4050	40%	39W	5750

# STRUCTURE DESIGN

## Rugged Housing

Sealed die-cast aluminum housing with high-quality UV-resistant polycarbonate lens

## Watt & Color Selectable

Includes selectable switch to set lumen output and selectable color temperature (3000K/4000K/5000K).



## Photocell

Built-in photocell with cover cap to deactivate


## Emergency Battery

Optional emergency battery backup 8W 900LM 90MIN


# FIXTURE FEATURES

Switch controlled wattage and color temperature

On/Off Photocell  
(includes cover cap to deactivate)

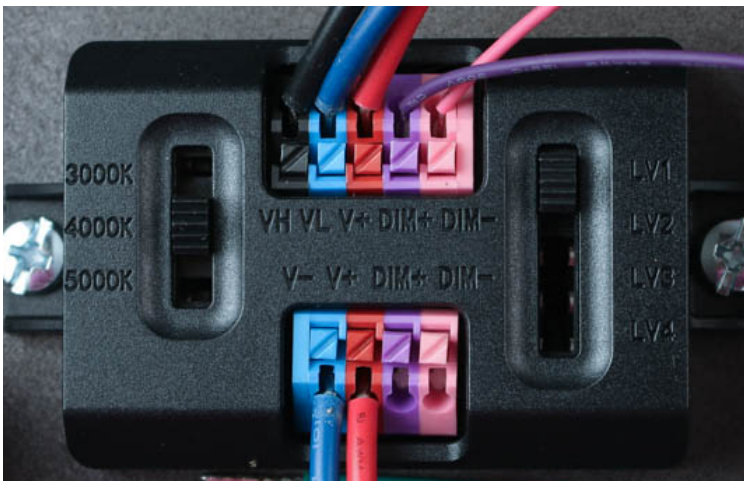

# PHOTOMETRICS

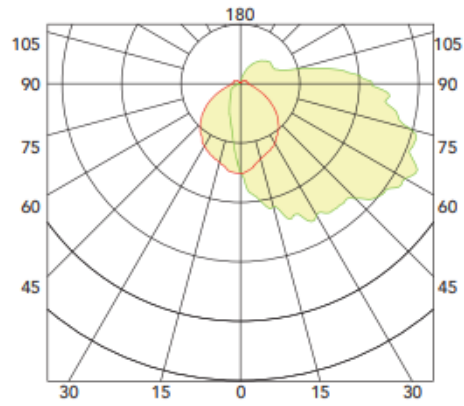

# DIMENSIONS

