



RDR Downlight Retrofit

FEATURES

- Replaces legacy 4" or 6" CFL or incandescent downlights
- Provides comfortable diffused light with no dark spots
- Integrated white trim with medium base (E26) socket adapters (included) for direct replacement
- FieldCCeT feature (select models) allows for multiple "set and forget" CCT options in each fixture

CERTIFICATIONS

- UL Listed for Wet/Damp locations
- ENERGY STAR® Approved for superior energy efficiency
- Title 20 certified and supports compliance with Title 24 (JA8) (90CRI models)

PERFORMANCE

- Rated lifetime L70: 35,000
- 3000K CCT
- FieldCCeT: 27/30/35/40/5000K
- CRI: >80; >90

ELECTRICAL

- Input voltage: 120V
- Triac dimming
- Power Factor: >0.9
- THD: <20%

THERMAL


- -4°F to 104°F (-20°C to 40°C) operating temperature

CONSTRUCTION

- White finish
- Frosted lens for diffuse lighting

WARRANTY

- 5 year limited warranty. Additional warranty options available. Contact EiKO for details

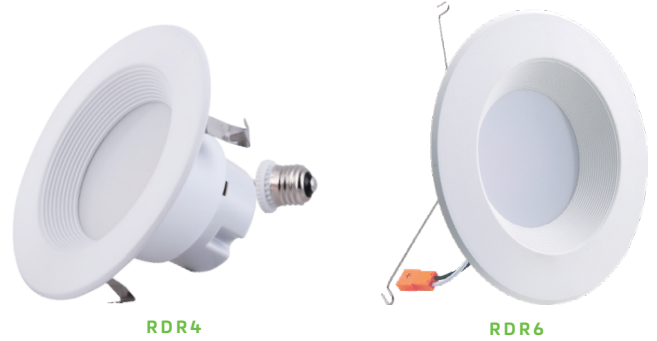

FIELD CCeT allows the user to select the desired color temperature on install using a switch on the back of the fixture.

POWER SET allows for multiple "set and forget" lumen stops in each fixture.

APPLICATIONS

- Multi-Residential (Dorms/Apartments)
- Classroom
- Office
- Reception/Lobby
- Restrooms
- Retail
- Dr. Offices/Waiting/Patient Rooms
- Library
- Meeting rooms
- Dining/Cafeteria
- Airports
- Automotive Dealerships
- Hallways
- Stairwells

NOMENCLATURE

MODEL	SIZE	LUMENS	WATTS	CRI/CCT	VOLTAGE	DIMMING	FINISH	REFLECTOR	
RDR : Downlight Retrofit	4 - 4"	65 - 650 lm	10W - 10W	830 - 80 CRI; 3000K	120 - 120V	DT - Triac Dimming	WH - White	B - Baffle	
		65 - 650 lm	13W - 13W						
		85 - 850 lm	13W - 13W						
		[Blank] 1,100 lm	13W - 13W						
	6 - 6"	75 - 750 lm	11W - 11W						
		[Blank] 900 lm	13W - 13W						
		[Blank] 1,500 lm	16W - 16W						
	120 - 1,200 lm	17W - 17W							
	4 - 4"	[Blank] 800 lm	10W - 10W						9CCT5 - 90 CRI; 27/30/35/40/5000K (FieldCCeT)
	6 - 6"	[Blank] 1,040 lm	13W - 13W						
4 - 4"	[Blank] 1,040/800/640 lm	PS13 - 13W/10W/8W	9FCCT - 90 CRI; 27/30/35/40/5000K (FieldCCeT)						
6 - 6"	[Blank] 1,400/1,100/850 lm	PS17 - 17W/13W/10W							



(90CRI models only)

PERFORMANCE SUMMARY

ORDER CODE	ITEM #	SIZE	WATTS	LUMENS	CCT	CRI	VOLTS	DAMP/WET LOCATION	TITLE 20/JA8	ENERGY STAR
11199	RDR4-65-10W-830-120DT-WH-B	4"	10W	650	3000K	>80	120V	Damp		★
11203	RDR4-85-13W-830-120DT-WH-B	4"	13W	850	3000K	>80	120V	Wet		★
12518	RDR4/13W/830/120DTWHB	4"	13W	650	3000K	>80	120V	Wet		★
11201	RDR6-75-11W-830-120DT-WH-B	6"	11W	750	3000K	>80	120V	Damp		★
12670	RDR6/13W/830/120DT	6"	13W	900	3000K	>80	120V	Wet		★
12519	RDR6/16W/830/120DTWHB	6"	16W	1,500	3000K	>80	120V	Wet		★
11204	RDR6-120-17W-830-120DT-WH-B	6"	17W	1,200	3000K	>80	120V	Wet		★

FIELD CCT

11571	RDR4/10W/9CCT5/120DTWHB	4"	10W	800	27/30/35/40/5000K	>90	120V	Wet	✓	★
11572	RDR6/13W/9CCT5/120DTWHB	6"	13W	1,040	27/30/35/40/5000K	>90	120V	Wet	✓	★

POWERSET AND FIELD CCT

12520	RDR4/PS13/9FCCT/120DTWHB	4"	13W/10W/8W	1,040/800/640	27/30/35/40/5000K	>90	120V	Wet	✓	★
12521	RDR6/PS17/9FCCT/120DTWHB	6"	17W/13W/10W	1,400/1,100/850	27/30/35/40/5000K	>90	120V	Wet	✓	★

PRODUCT DIMENSIONS

