

CANOPY FIXTURE CP SERIES

CONTRACTOR CHOICE

The Contractor Choice LED canopy fixture is a DLC premium parking garage luminaire with a low-profile design. Each fixtures includes a switch to select between 4 different wattage packages and 3 different color temperatures. This allows for mounting at various heights and for multiple different applications. This unit includes an external quick mounting plate for installation on a standard J-Box or 3/4" pendant mount. With three 1/2" knock-out holes on three sides, the ease of conduit installation is sure to impress.



Features

- Includes built-in wattage selectable switch
 - CP-60W (24W - 35W - 46W - 60W)
 - CP-110W (44W - 66W - 88W - 110W)
- Includes built-in color selectable switch
 - CCT (3000K - 4000K - 5000K)
- Rugged die-cast aluminum housing with a low-profile
- Corrosion-resistant powder coating
- J-Box or 3/4" pendant
- Dark bronze finish
- Standard 0-10V dimming driver
- Operating temperature of -40° to 104° F
 - Battery backup 50° to 104° F
- Wet location rated
- Universal 120-277V input voltage
- 50,000-hour rated life
 - based on IES LM-80 and TM-21 calculations
- 5-year manufacturer limited warranty
- DLC Premium
 - *Parking Garage Luminaires*



Order Code

SKU: CP-110W-DDK-EM

Fixture Type	Adjustable Wattage	CCT (Adjustable Color Temp)	Emergency Battery Backup
CP (Canopy Light)	60W (24W/36W/47W/60W) 110W (44W/66W/88W/110W)	DDK (3000K/4000K/5000K)	Blank (No Battery Backup) EM (Battery Backup)

Adjustable Lumen Output

CP-60W			CP-110W		
SETTING	WATTAGE	LUMENS (4000K)	SETTING	WATTAGE	LUMENS (4000K)
100%	60W	8400	100%	110W	17000
80%	47W	7000	80%	88W	14000
60%	36W	5600	60%	66W	10800
40%	24W	4000	40%	44W	7400

STRUCTURE DESIGN

Rugged Housing

One-piece die-cast aluminum housing with an optimal thermal design to extend the life of the fixture and enhance the efficacy

Mounting

Surface J-Box or 3/4" pendant mount

Watt & Color Selectable

Includes selectable switch to set lumen output and selectable color temperature (3000K/4000K/5000K).



Emergency Battery

Optional emergency battery backup 8W 900LM 90MIN


FIXTURE FEATURES

CCT AND WATTAGE SELECTABLE
This fixture has the function of adjusting the lumens output and color temperature on-site.

WATTAGE SELECT			
●	●	●	●
40%	60%	80%	100%
Each model supports 4 positions wattage regulation: 100%, 80%, 60%, 40%			

CCT SELECT		
■	■	■
3000K	4000K	5000K
Offer three CCT adjustable (3000K, 4000K, 5000K) .		

PHOTOMETRICS

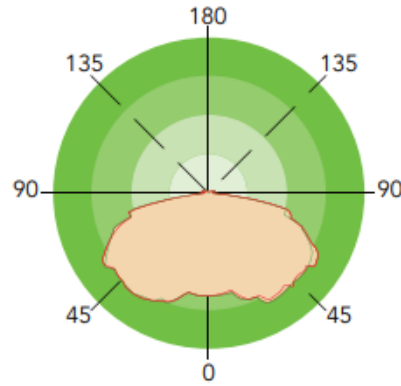

MOUNTING



DIMENSIONS

unit: mm/inch

