



Contractor Select™

# FMLR

Switchable White LED Low Profile  
Flush Mount 11" Round with  
Interchangeable Trim

The round low profile 11in. LED Flush Mount features an acrylic diffuser with a sleek, compact design with a touch of modern elegance. A white and black trim ring included to interchange the design to compliment any decor. An integrated 5CCT switch (2700K/3000K/4000K/5000K) allows the end user to fine-tune the feel of their space to insure the right amount of light.

**FEATURES:**

- Easy-latch secures diffuser to housing, ceiling mount only
- Ideal for new construction or renovation in residential single and multi-family applications as well as light commercial
- Ideal for foyers, hallways, bedrooms, stairways and utility rooms
- Installs directly into industry standard junction boxes
- Suitable for use in closets, compliant when installed to NFPA® 70 NEC® Section 410.16 (A)(1) and (C)(1)



**FMLR 11IN  
Black Trim**



**FMLR 11IN  
White Trim**



| Catalog Number              | UPC            | Description                                     | Lumens | Input Watts | CCT                           | CRI | Voltage | Trim Ring Finish      | Pallet qty. |
|-----------------------------|----------------|---|--------|-------------|-------------------------------|-----|---------|-----------------------|-------------|
| FMLR 11IN SWWS 90CRI WBT M4 | 00196183681843 | 11" Round Flush Mount with Interchangeable Trim | 1200L  | 18W         | 2700K/3000K/3500K/4000K/5000K | 90  | 120V    | White/Black Trim Ring | 144         |




### JBOX Compatibility

|                    | 3-1/2" Octagon Box Steel | 4" Drawn Octagon 1-1/2" Deep Steel | 3-1/2" Drawn Round Ceiling Pan Steel / Old Work | 4" Round Plastic / New York | 4" Drawn Round Ceiling Pan Steel | 4" Round Plastic / New Work | 4" Dia. Ceiling Box With Bar Plastic / New York |
|--------------------|--------------------------|------------------------------------|---|-----------------------------|----------------------------------|-----------------------------|---|
|                    |                          |                                    |   |                             |                                  |                             |   |
| Exterior LXWXH     | 3.2" x 3.2" x 1.55"      | 3.54" x 3.54" x 1.55"              | 3.38" Rd. x 0.5" Dep.                           | 4" Dia. x 2.3"              | 4" Dia. x 0.5" Dep.              | 4" Dia. x 2.375"            | 14.5" x 4.5" x 4"                               |
| Mounting Dimension | 2.75"                    | 3.5"                               | 2.75"   | 2.75" / 3.5"                | 3.5"                             | 2.75" / 3.5"                | 2.75" / 3.5"                                    |
| Fixture            | JSBT 4IN/ JSBT 6IN       | JSBT 6IN                           | JSBT 4IN/ JSBT 6IN                              | JSBT 4IN/ JSBT 6IN          | JSBT 6IN                         | JSBT 4IN/ JSBT 6IN          | JSBT 4IN/ JSBT 6IN                              |

|                    | 4" Square Box* | WiringPro 4" Square Box* | Iberville 4" Octagonal Box* |
|--------------------|----------------|--------------------------|-----------------------------|
|                    |                |                          |                             |
| Exterior LXWXH     | 4" x 4" x 1.5" | 4" X 4" X 1.5"           | 4" x 4" x 1.5"              |
| Mounting Dimension | 4"             | 4"                       | 4"                          |
| Fixture            | JSBT 4IN       | JSBT 4IN                 | JSBT 4IN                    |

### Canadian 4IN J-Box Bracket

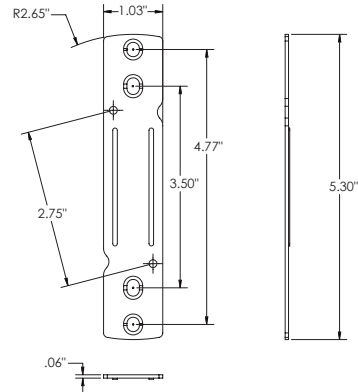

JSBTADAPTR 4IN CNDA M50

\* When ordering these junction boxes for Canada requires JSBTADAPTR 4IN CNDA M50.

### Dimmer Compatibility

| Forward Phase Dimmers                                      | Reverse Phase Dimmers                                    | Acuity Brands Dimmers                                   |
|--|--|---|
| Lutron Maestro Rocker style 120V 600W/MACL-153M/ STCL-153  | Lutron Diva ELV® single pole 120V 300W/DVELV-300P        | Acuity SensorSwitch® Forward phase paddle dimmer/WPD WH |
| Lutron RadioRa 250W Resi Dimmer/RRD-PRO                    | Lutron Maestro ELV® single pole 120V 600W/MAELV-600      |   |
| Lutron Vive Wireless dimmer w/ neutral 120V 600W/MRF2S-6ND | Lutron Vive® Wireless Reverse-phase 120V 600W/MRF2S-6ELV |   |
| Lutron Caseta Wireless in-wall 150W/PD-6WCL                | Lutron Caseta® Reverse-Phase 120V 150W/PD-SNE            |   |
| Leviton SureSlide INC 3-way 120V 600W/6674-10W             |  |   |
| Leviton Illumatech® INC single pole 120V 600W/IPL06-10Z    |  |   |

| LIGHTING PERFORMANCE DATA<br>DONNÉES SUR LE RENDEMENT<br>DE L'ÉCLAIRAGE |                                  |
|---|----------------------------------|
| Light Appearance (CCT)<br>Aspect de la lumière (CCT)                    |                                  |
| 2700K soft white   blanc doux   | 1217 lumens   70 lumens per watt |
| 3000K warm white   blanc chaud  | 1273 lumens   74 lumens per watt |
| 3500K neutral white   blanc neutre                                      | 1300 lumens   75 lumens per watt |
| 4000K cool white   blanc froid  | 1313 lumens   76 lumens per watt |
| 5000K daylight   blanc neutre   | 1326 lumens   77 lumens per watt |
| Watts   | 17.2                             |
| Color Accuracy (CRI)<br>Précision des couleurs (CRI)                    | 90                               |



## Specifications

### INTENDED USE:

The Juno FMLR Round Indoor Flush Mount comes in 11" size and provides a modern aesthetic, at a low cost, with an easy installation, perfect for both contractors and DIYers. The FMLR ships as matte white but includes a black interchangeable trim in the package to bring a design element to match with any desired aesthetic. Additionally, the FMLR features a switch directly on the product that allows you to choose your desired color temperature.

### CONSTRUCTION:

Low profile white acrylic diffuser and steel pan • Milky white acrylic, diffuser dome lens conceals the LEDs from direct view and provides uniform lens luminance.

### ELECTRICAL:

Accommodates 120 volts AC at 60Hz • 90 CRI minimum • Dimmable with most standard magnetic low voltage and electronic low voltage dimmers.

### JUNCTION BOX MOUNTING:

The driverless FMLR installs directly into industry standard junction boxes that requires no separate mounting bracket for installation • Compatible boxes include 3-1/2" and 4" octagon junction boxes (1-1/2" minimum depth), round mud rings with 2-3/4" mounting centers, and 3" & 4" diameter non-metallic boxes • Provides fast installation of fully assembled fixture to JBox • Suitable for ceiling mount • Suitable for use in closets, compliant when installed to NFPA® 70 NEC® Section 410.16 (A)(1) and (C)(1).

### LIFE:

High performance, long functional life of 50,000 hrs (L70).

### LISTINGS:

CSA certified to US and Canadian safety standards • ENERGY STAR® Certified • Damp location listed • Certified to the high efficacy requirements of California T24 JA8-2022.

### WARRANTY:

5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: [www.acuitybrands.com/support/warranty/terms-and-conditions](http://www.acuitybrands.com/support/warranty/terms-and-conditions)

**Note:** All reports are based on published industry procedures; actual performance may differ as a result of the end-user environment and applications.

All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

## Dimensions

|           | Width | Depth | Lens Opening |
|-----------|-------|-------|--------------|
| FMLR 11IN | 11.05 | 2.81  | 11           |

All dimensions are inches (centimeters) unless otherwise indicated.

