

## LED Luminaires

### ProLED Select Flushmount Fixtures

- Five selectable color temperatures
- Provides a diffused, low glare light output
- Triac dimming
- 50,000 hour L70
- 5 year warranty



### Specifications

#### Description

The ProLED Select Flushmount Fixtures feature a modern, functional design that provides a sophisticated look to the application without sacrificing efficiency. These high performing products feature five selectable color temperatures, a low glare output and are dimmable to 10%. The ProLED Select Flushmount Fixtures are available in two housing styles and various sizes to compliment any decorative residential or commercial application.

#### Performance

- Selectable Color Temperatures 2700K, 3000K, 3500K, 4500K, 5000K
- 75 Lumens per watt
- 80+ CRI
- L70 Lumen Maintenance > 50,000 Hours
- Dimmable to 10% on Compatible Dimmers
- 120VAC Input
- Suitable for Use in Closets When Installed in Accordance with NFPA 70, NEC Section 410.16 (A)(3) and 410.16 (C)(5)
- 5 Year Limited Warranty

#### Construction

- Robust Steel Housing - White finish
- Diffused Polycarbonate Lens
- Driver on board
- CCT Selection Switch on LED Board
- Simple Installation

#### Certifications

- ETL Listed

### Performance Table

Product Code	Wattage	2700K	3000K	3500K	4000K	5000K
		Lumen Output (lm)	Lumen Output (lm)	Lumen Output (lm)	Lumen Output (lm)	Lumen Output (lm)
FM-DR12-16-CS	16	1193	1243	1297	1316	1314
FM-DR14-20-CS	20	1498	1638	1710	1741	1655
FM-DR16-24-CS	24	1607	1868	1868	1905	1905
FM-M11-16-CS	16	1312	1407	1463	1465	1393
FM-M14-24-CS	24	1489	1614	1697	1714	1780

# ProLED Select Flushmount Fixtures

## Product Description

Ordering Logic EX: FM-DR-16-20-CS

Series	Design	Product Size	Wattage	CCT
FM = Flushmount	DR = Double Ring M = Mushroom	12 = 12 inch 14 = 14 inch 16 = 16 inch 11 = 11 inch	16 = 16W 20 = 20W 24 = 24W	CS = Color Selectable 2700K/3000K/3500K/ 4000K/5000K

\* For Options and Non-Stock Items - Lead Times Apply

## Ordering Information


Product SKU	Product Code	Product Description
90260	FM-DR12-16-CS	ProLED Select Flush Mount Double Ring 12" 16W Selectable CCT 120V Dimmable
90261	FM-DR14-20-CS	ProLED Select Flush Mount Double Ring 14" 20W Selectable CCT 120V Dimmable
90262	FM-DR16-24-CS	ProLED Select Flush Mount Double Ring 16" 24W Selectable CCT 120V Dimmable
90263	FM-M11-16-CS	ProLED Select Flush Mount Mushroom 11" 16W Selectable CCT 120V Dimmable
90264	FM-M14-24-CS	ProLED Select Flush Mount Mushroom 14" 24W Selectable CCT 120V Dimmable

## Specifications Table

	FM-DR12-16-CS	FM-DR14-20-CS	FM-DR16-24-CS	FM-M11-16-CS	FM-M14-24-CS
Nominal Wattage	16W	20W	24W	16W	24W
Delivered Lumens	1193lm - 1316lm	1498lm - 1741lm	1607lm - 1905lm	1312lm - 1465lm	1489lm - 1780lm
Efficacy (lm/W)	74LPW - 82LPW	75LPW - 87LPW	66LPW - 79LPW	82LPW - 91LPW	62LPW - 74LPW
CCT	Selectable - 2700K, 3000K, 3500K, 4000K, 5000K				
CRI	80+				
L70 Lifetime (hrs)	50,000				
Voltage	120VAC				
Power Factor	>0.9				
Dimming	>10%				
Housing Material	Steel				
Lens	Diffused Polycarbonate				
Operating Temperature	-4°F - 104°F				
Listings	ETL				
Environment	Damp Location				
Warranty	5 years Standard				

## ProLED Select Flushmount Fixtures

### Dimensions

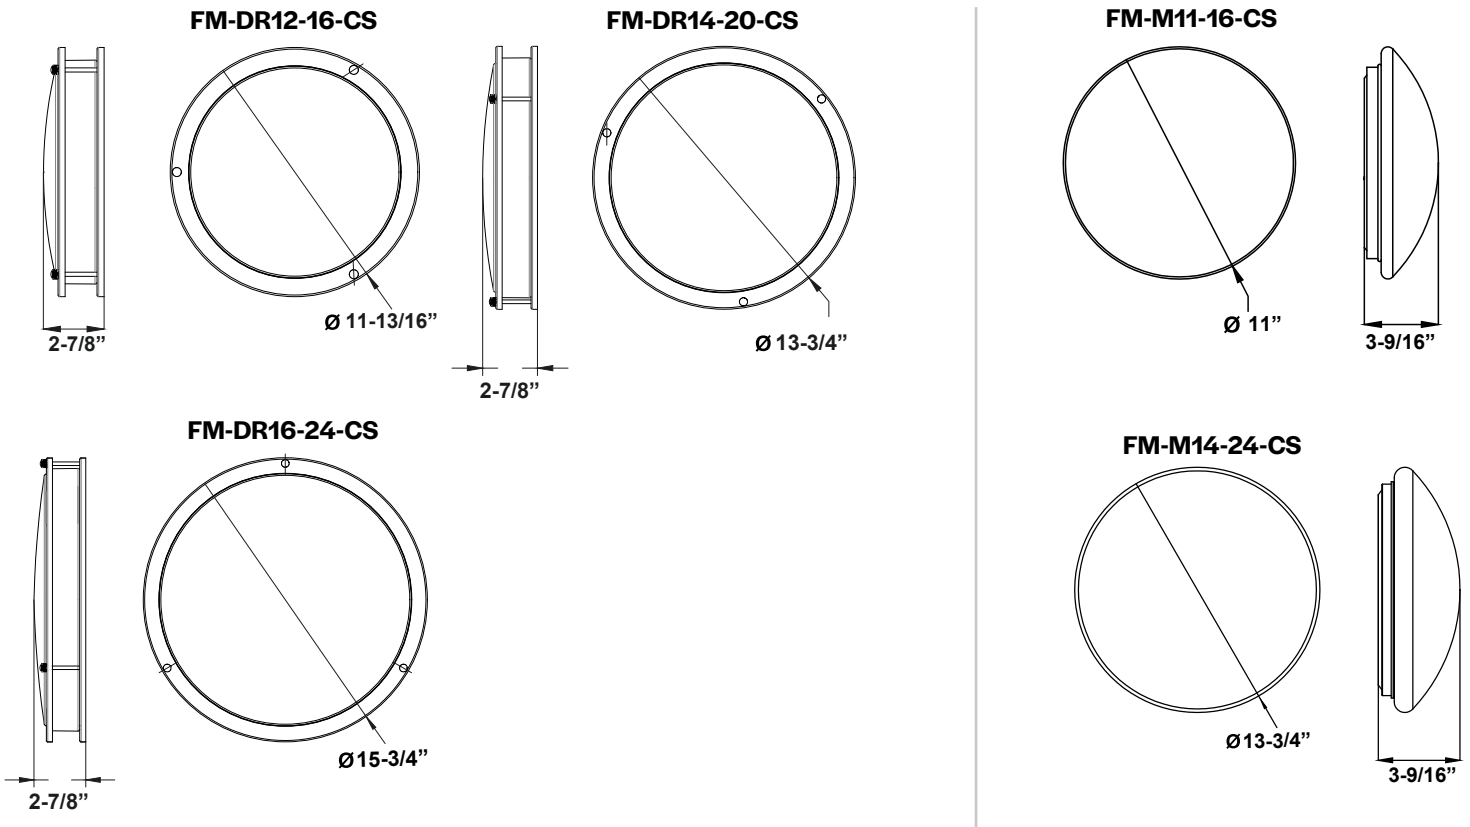

#### Dimmer Compatability List

Dimmer Brand	Dimmer Model
LUTRON	MACL-153M
LUTRON	P-PKG1W-WH-R
LUTRON	DVCL-153P
LUTRON	CTCL-153PDH-WH
LUTRON	TGCL-153PH-WH
LEVITON	R12-06672-1LW
LEVITON	R50-IPLO6-10M
LEVITON	R62-066740POW
EATON	SALO6P-LA-K
EATON	AALO6-C1

## ProLED Select Flushmount Fixtures

### Photometry

\*The below diagrams and zonal lumen summaries represent set at 3000K.

