



All-in-one design with solar panel, light engine and battery built into the fixture. No need for a power source, which eliminates the need for wiring and trenching. The perfect luminaire for signage, billboards, advertisements & more.



BATTERY  
indicator

- ▶ Comparable to 70W or 150W HID.
- ▶ 4 hours of 100% brightness, then 25% for the remainder of the night with one charge.
- ▶ Standard bracket included, optional clamp mount bracket available.
- ▶ Replaceable Li-Ion battery lasts at least 1500 charge cycles.



BATTERY  
CHARGE TIME



BATTERY  
CHARGING TEMP



REPLACEABLE  
BATTERY



BATTERY LIFE



BEAM ANGLE



OPERATING TEMP  
-4°F TO 140°F



50,000hrs  
RATED LIFE

PART #	UPC	COMPARES TO	LUMENS	COLOR	LISTINGS
SL-SDL-2FT-40K-BK-G2	844006085193	70W HID	750	4000K	CE FC
SL-SDL-4FT-40K-BK-G2	844006085926	150W HID	2000	4000K	

#### ACCESSORIES

PART #	DESCRIPTION	OPERATING MODES
RP-SDL-BK-LB	7" CLAMP MOUNT BRACKET (2 PACK)	OPERATING MODES    CONSTANT BRIGHTNESS    TIMER

PART NUMBER BUILDER


MFR	PRODUCT	LENGTH (FT)	WATTAGE	COMPARES TO	COLOR	FIXTURE COLOR	GENERATION
SL	SDL				40K		
		2F		70W HID		BK = BLACK	G2 = GENERATION 2
		4F	20W	150W HID			

EXAMPLE PART NUMBER

SL-SDL-2FT-40K-BK-G2

DIMENSIONS

2FT (SL-SDL-2FT)

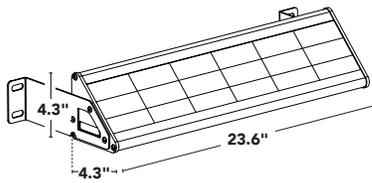

RP-SDL-20W

