

WPMX SERIES Outdoor Lighting

WPMX-48-80W-MCTP-SR

WPMX-48-80W-MCTP-BK

WPMX-48-80W-MCTP-WH

WPMX-48-80W-MCTP-SIL

HALF-MOON WALL PACK-POWER & CCT ADJUSTABLE

MCTP Multi Color Temperature & Multi Power/Wattage (Selectable)



Avail Finishes:



LED Wall Pack Light series can be widely used as Exterior or Interior LED lighting for Hotels, Garages, Commercial Buildings, Public areas, Schools and Hospitals, etc.


WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

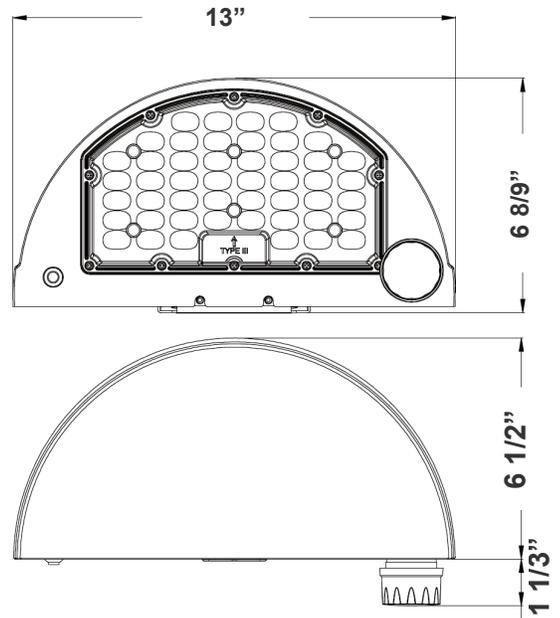

13" (W) x 6 8/9" (H) x 6 1/2" (D)

Features

- High Light Transmittance, Anti-UV and Fire Resistant PC Lens
- 7-Year Warranty
- Die-Cast Aluminum With Powder Coat Finish (Dark Bronze)
- Multi CCT and Power (Switches are inside fixture)

Technical Specifications

Electrical:

- Voltage: 120-277VAC 60Hz
- Wattage: 48W/64W/80W
- Power Factor: >0.95
- Efficacy: 135 LPW

Mechanical:

- Twist-Lock Zhaga Socket Pre-Installed. See Motion Sensor Accessories
- Die-Cast Aluminum With Powder Coat Finish
- High Light Transmittance, Anti-UV and Fire Resistant Shatterproof PC Lens
- Operating Temperature: -4°F to 104°F
- Full Cutoff, Dark Sky Compliant
- IP 65, Wet Location
- 7-Year Warranty

Lighting:


- Dimming: 0~10V Dimmable
- Multi CCT and Power (Switches are inside fixture)
- The Type III Distribution Is Used for Wide WalkWays, on Ramps and Entrance Roadways, As Well As Other Long, Narrow Lighting
- Total Lumens: 10800LM Max.
- Color Temperatures: 3000K/4000K/5000K
- Color Rendering Index: CRI ≥ 80
- Rated Life: 70,000 Hrs

Applications:


- LED Wall Pack Light series can be widely used as Exterior or Interior LED lighting for Hotels, Garages, Commercial Buildings, Public areas, Schools and Hospitals, etc.



Photometrics: WPMX-48-80W-MCTP-SR



BUD Rating: B0-U0-G1

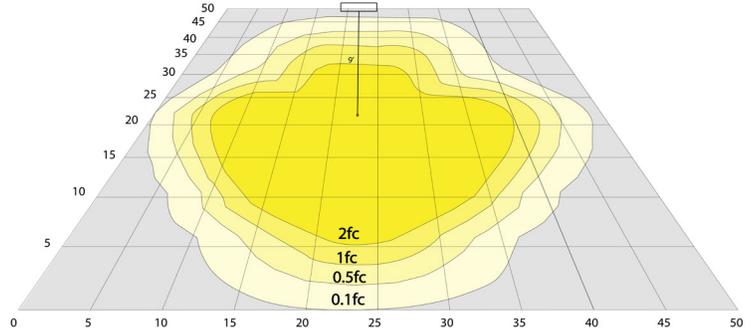

Area 45'x 50' Mounting Height: 9'

Other Views:



Side View



Front View



Back View



Side View



Front View



Back View



Side View



Front View



Back View



Side View



Front View



Back View

Performance Table: WPMX-48-80W-MCTP-SR

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
WPMX-48-80W-MCTP-SR	48W	120~277V	6400LM	3000K	B0-U0-G1	135
WPMX-48-80W-MCTP-BK	64W		8640LM	4000K		
WPMX-48-80W-MCTP-SIL	80W		10800LM	5000K		
WPMX-48-80W-MCTP-WH						

Sample Ordering

Model Wattage. Wattage. Color Temp. Finishes

WPX - 48 - 80W - MCTP -

SR = Bronze
BK = Black
SIL = Silver
WH = White

Factory-Installed Options:

- Blank = No Option For Accessories
- WEC-8RC = OPTIONAL REMOTE
- OPT-EM-WPMX-48 = INTERNAL BACK UP BATTERY
- OPT-CLR-85(BK/GR/SR/WH) = PAINT
- OPT-SEN-3MRLV-5 = PROGRAMMABLE MICROWAVE (BI-LEVEL FOR 80W)
- OPT-CLR-MC (260 SET UP FEE PER PROJECT) = PAINT
- OPT-TRS-T20 = TAMPER RESISTANT SCREW
- OPT-WP-480V = CHANGE VOLTAGE

FACTORY-INSTALLED OPTIONS:



OPT-PC-B



WEC-8RC



WEC-SEN-3MRLV-5



OPT-EM-WPMX-48



COLOR CHART: * Choose from one of our Premium Colors with no set-up fee.

Gloss:



SILVER METALLIC
70 GLOSS
T357-GR105



SILVER METALLIC
30 GLOSS
T353-GR06



DARK RED 90
GLOSS
P009-RD02



INTERNATIONAL
ORANGE 90
GLOSS
T009-OG26




SAFETY ORANGE
90 GLOSS
T009-OG01



YELLOW 90
GLOSS
T009-YL14



YELLOW 90
GLOSS
T009-YL01



TRAFFIC GREEN
70 GLOSS
T007-GN16



GREEN 70 GLOSS
T007-GN13



GREEN 60 GLOSS
C006-GN03



BLUE 90 GLOSS
T009-BL01



DARK BLUE 80
GLOSS
T008-BL20



RAL 8028 TERRA
BROWN 90 GLOSS
C209-BR358

Hammer:




WHITE HAMMER
T013-WH09



BEIGE HAMMER
T013-BG38



GREY HAMMER
C013-GR08



SILVER
HAMMERTONE
T064-GR05



BLACK HAMMER
T013-BK62



RED HAMMER
T013-RD15



GREEN HAMMER
T013-GN220



BLUE HAMMER
T013-BL468



BRONZE HAMMER
T012-BR161

Texture:



WHITE TEXTURE
C031-WH120



FLINT GRAY
TEXTURE
T243-GR522



BLACK TEXTURE
C241-BK109



RED TEXTURE
T241-RD129




BLUE TEXTURE
C241-BL544




OIL RUBBED
BRONZE TEXTURE
T291-BR251

Vein:



BLACK/WHITE
VEIN
T075-WH34



SILVER VEIN
T375-BK26



COPPER VEIN
EXTERIOR
T075-BK211



GOLD VEIN
T375-BK10



COPPER VEIN
T375-BK07

