

FDLH SERIES

Residential Lighting

FDLH-12-MCT5

HALF CIRCLE INDOOR WALL SCONCE,

MCT5 Multi Color Temperature (Selectable)



This wall sconce allows homeowners to customize the lighting ambiance to suit their mood and decor. The brushed nickel finish adds a modern, sophisticated touch to any room, seamlessly blending with various interior styles. Whether used in living rooms, bedrooms, hallways, or entryways, this wall sconce provides a perfect balance of style and functionality. Its sleek design and high-quality light output make it an excellent choice for creating a warm, inviting atmosphere in any home.


WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

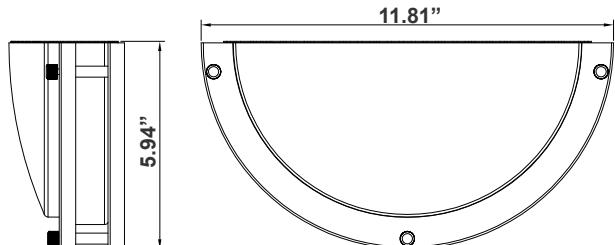

11.81" (W) x 5.94" (H)

Features

- Construction: Spun Aluminum + Steel (Black Finish)
- Optics: White Translucent Acrylic Lens
- 5-Year Warranty
- 50,000 Hours Rated Life
- Multi-CCT (Selectable With Switch Is On The LED Board Under The Lens)

Technical Specifications

Electrical:

- Voltage: 120V AC
- Wattage: 12W
- Power Factor: >0.9
- Efficacy: 80 LPW

Mechanical:

- Optics: White Translucent Acrylic Lens
- Construction: Spun aluminum Steel (Brushed Nickel Finish)
- Operating Temp: -4°F~104°F
- IP Rating: IP20, Suitable for Damp Locations When Gasket is Used
- 5-Year Warranty

Lighting:



- Multi-CCT (Selectable With Switch Is On The LED Board Under The Lens)
- Dimmable Down to 10% Using a Standard TRIAC LED Dimmer
- Total Lumens: 960LM
- Color Temperatures: 2700K/3000K/3500K/4000K/5000K
- Color Rendering Index: CRI ≥ 80
- 50,000 Hours Rated Life

Applications:


- Living Rooms
- Bedrooms
- Hallways
- Entryways
- Bathrooms
- Kitchens
- Offices
- Hotels
- Restaurants
- Lobbies



Photometrics: FDLH-12-MCT5



BUD Rating: B1-U2-G1

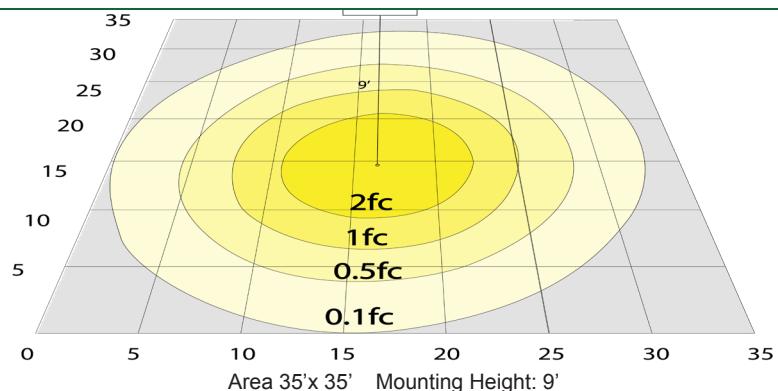

Other Views:



Side View



Front View

Performance Table: FDLH-12-MCT5

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
FDLH-12-MCT5	12W	120V	960LM	2700K 3000K 3500K 4000K 5000K	B1-U2-G1	80

Sample Ordering

Model Size Color Temp.

FDLH - 12 - MCT5