

LDSB SERIES

Outdoor Lighting

LDSB-40-MCTP-DD-ORB

40" OUTDOOR/INDOOR LED DECORATIVE WALL SCONCE



Multi Color Temperature & Multi Power/Wattage (Selectable)



Wall sconce fixture updated with the latest in LED technology. It provides accent illumination that visually expands the space and creates a relaxing atmosphere. Ideal for use in hallways, stairways, dining areas, foyers, and meeting rooms for residential and commercial applications. The long LED life, coupled with exceptional color rendering, make this fixture attractive for new or retrofit projects.

WESTGATE


THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

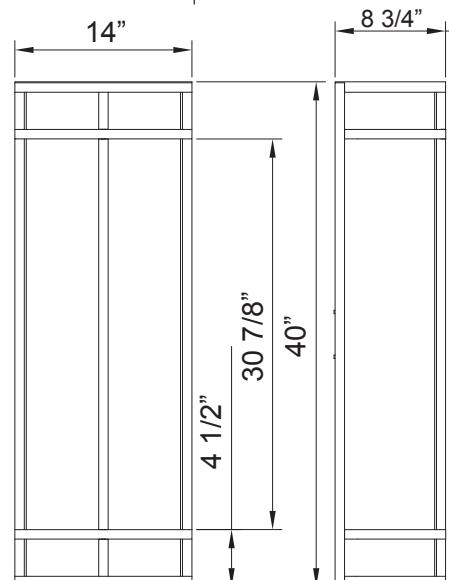

40"(H) x 14"(W) x 8 3/4"(D)

Features

- High-Transmission Frosted Plastic Lens with Excellent Distribution and Uniformity
- Direct replacement for Fluorescent
- Full distribution LED luminaries
- 70,000 Hours Rated Life
- 7-Year Warranty

Technical Specifications

Electrical:

- Voltage: 120-277V
- Wattage: 40W/60W/80W
- Power Factor: >0.9
- Efficacy: 80 LPW

Mechanical:

- Die-Cast Aluminum Housing With Powder Coat Finish
- High-Transmission Frosted Plastic Lens With Excellent Distribution and Uniformity
- Direct Replacement For Fluorescent
- Full Distribution LED luminaries
- IP Rating: IP65
- Operating Temperature: -4°F to 113°F
- Suitable For Wet Locations

Lighting:

- Dimming: (Dual Function) Triac Dimmable at 120V& 0-10V Dimming at 120-277V
- Multi CCT: Selectable CCTs Switch Located On The LED Board
- Total Lumens: 6400LM
- Color Temperature: 3000K/4000K/5000K
- Color Rendering Index: ≥ 80
- Beam Angle: 120°

Applications:


- Motel, Hotels, Hospitals, hallways, stairways, dining areas, foyers, and meeting rooms

Other Models:



- 80W | 6400LM | LDSB-40-MCP-DD-SIL
- 30W | 2400LM | LDSC-18-MCTP-DD-BK



Photometrics: LDSB-40-MCTP-DD-ORB



BUG Rating: B1-U3-G1

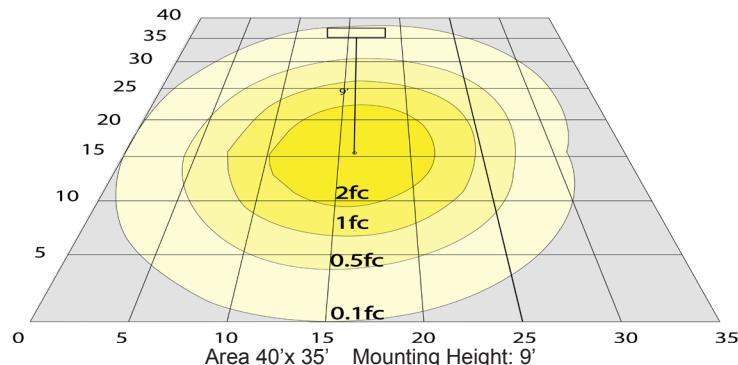

Other Views:



Side View



Front View



Bottom View

Performance Table: LDSB-40-MCTP-DD-ORB

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LDSB-40-MCTP-DD-ORB	40W	120V	2400LM	3000K		
	60W		4800LM	4000K	B1-U3-G1	
	80W		6400LM	5000K		80

Sample Ordering

Model Size Color Temp. Dimming Housing

LDSB - 40 - MCTP - DD - ORB

FACTORY-INSTALLED OPTIONS:



OPT-EM-LDSB

Factory-Installed Options:

Blank = No Option For Accessories

OPT-EM-LDSB = EMERGENCY BACKUP INTERNAL BATTERY, BACK BOX

OPT-PC-B = PHOTOCELL