


# GPH SERIES Outdoor Lighting

**GPH-12-40W-MCTP-BK**  
MODERN TOP-HAT POST-TOP AREA LIGHT WITH INDIRECT LIGHT SOURCE  
**MCTP** Multi Color Temperature & Multi Power/Wattage (Selectable)



Customer Name: \_\_\_\_\_  
Project Name: \_\_\_\_\_  
Note: \_\_\_\_\_ | Type: \_\_\_\_\_

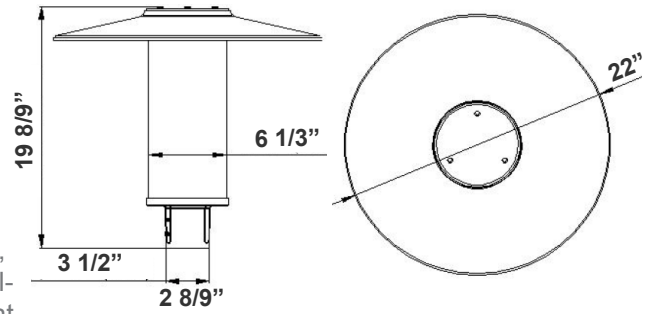

19 8/9" (H) x 22" (D)

GPH is a classic led post-top light for illuminating yards, parks, parking areas, and other public outdoor spaces. It is well-shielded and delivers clear white light, creating a pleasant ambiance while enabling good energy savings. Symmetrical light distribution is designed for area lighting. It is made of high-quality, durable materials and can be directly mounted on a Ø 60 mm & Ø 76 mm post. A glare shield is an accessory that makes light-dark sky friendly, no upward light.

## Features

- Powder Coating: Black
- Aluminum Housing & PC Lens
- 7-Year Warranty
- Multi-CCT & Power: Switch Is Inside Fixture

## Technical Specifications

### Electrical:

- Voltage: 120-277V AC 60Hz
- Wattage: 12W/20W/30W/40W
- Power Factor: >0.90
- Efficacy: 100LM/W

### Mechanical:

- Aluminum Housing & PC Lens
- Powder Coating: Black
- EPA (Effective Projected Area) Rating: 2.43 Square Feet
- Operating Temperature: -22°F to 122°F
- IP66 Suitable For Wet Location
- 7-Year Warranty

### Lighting:

- Dimming: 0-10V Dimming
- Multi-CCT & Power: Switch Is Inside Fixture
- LED: LED 3030
- Total Lumens: 4000LM Max.
- Color Temperatures: 3000K/4000K/5000K
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 85°
- Rated Life: 70,000 Hrs

### Applications:


- Courtyard
- Private and public garden
- Community
- Causeway

## Other Models:


- 40W | 4000LM | GPH-12-40W-MCTP-BR
- 40W | 4000LM | GPH-12-40W-MCTP-GY



**Photometrics:** GPH-12-40W-MCTP-BK

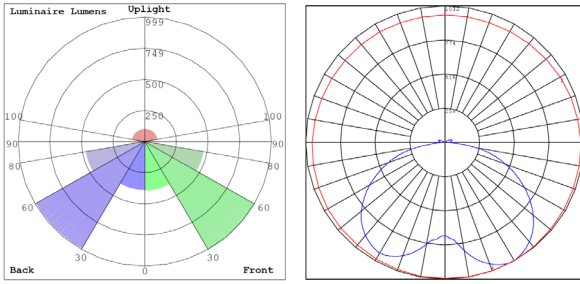

BUG Rating: B1-U3-G1

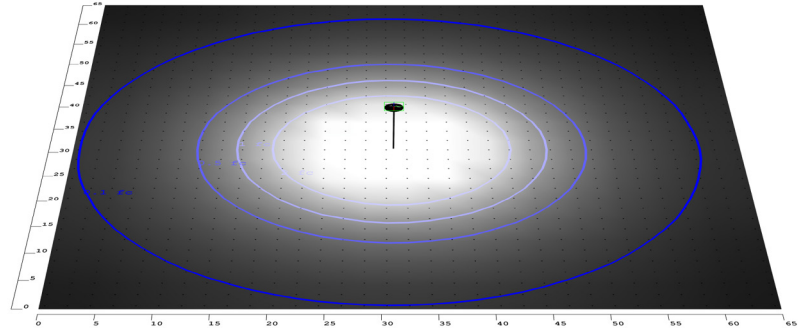

Area 65'x 65' Mounting Height: 9'

**Other Views:**



Side View



Top View



Bottom View

**Performance Table:** GPH-12-40W-MCTP-BK

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
GPH-12-40W-MCTP-BK	12W 20W 30W 40W	120-277V	1200LM 2000LM 3000LM 4000LM	3000K 4000K 5000K	B1-U3-G1	100

**Sample Ordering**

Model   Size   Watt   Color Temp.   Housing  
 -  -  -  -

**Accessories:**

Blank = No Option For Accessories  
 OPT-GPH-3IN-BK = 3IN POLE ENTRY Black

**Other Models:** GPH-12-40W-MCTP-GY



Side View



Top View



Bottom View

