


PathMAX™ Slim Bollards

Wattage/CCT Selectable

Accessories:

ORDER CODE	MODEL NUMBER	DESCRIPTION
112953	BL-BOLTKIT-3	ANCHOR BOLT KIT FOR 3 BOLT PATTERN SLIM ROUND BOLLARDS
112954	BL-BOLTKIT-4	ANCHOR BOLT KIT FOR 4 BOLT PATTERN SLIM SQUARE BOLLARDS
113326	BL-SHIELD6IN-L	SIDE SHIELD FOR 6 INCH SLIM BOLLARD, PVC FILM, BLACK
113329	BL-SHIELD8IN-L	SIDE SHIELD FOR 6 INCH SLIM BOLLARD, PVC FILM, BLACK



BL-BOLTKIT-3 **BL-BOLTKIT-4** **BL-SHIELD**
Anchor Bolt Kits Include 3/8" x 11" anchor bolts, hex nuts & washers.

NOTE: Anchor bolts are included with fixtures standard, refer to the accessory chart above when pre-shipment of anchor bolts is desired.

DLC 5.1 Listing

MODEL NUMBER	DLC PRODUCT ID#	DLC CLASSIFICATION	DLC PRIMARY USE DESIGNATION
BS130U-WCS[ALL OPTIONS]	S-BZCSNZ	Premium	Bollards
BS330U-WCS[ALL OPTIONS]	S-LBYB12		
BR[F,D]30U-WCS[ALL OPTIONS]	S-W3GFTR		
BSF30U-WCS[ALL OPTIONS]	S-FNTG16		

Lumen Chart

MODEL	10W	10W BUG	20W	20W BUG
BRD	1,260 - 1,350	B1-U3-G1	2,520 - 2,700	B2-U3-G2
BFR				
BSF	1,200 - 1,250	B1-U3-G1	2,400 - 2,500	B1-U3-G2
BS1/3	1,200 - 1,260	B1-U2-G1	2,400 - 2,520	B1-U2-G1


Specifications

	BRD - ROUND, DOME	BRF - ROUND, FLAT	BSF - SQUARE, FLAT	BS - 1 & 3 STILT LEG
Power Consumption (W)	10/20/30W (30W default)			
Lumens Delivered (lm)*	3,890 - 4,080		3,620 - 3,730	
Input Voltage	120-277V, 480V option			
Power Factor	>0.90			
Surge Protection	4kV			
CRI	≥80			
CCT (K)	Selectable - 3000/4000K/5000K			
BUG Rating	B2-U3-G2		B3-U3-G2	
L70 Lifetime (hrs)	>100,000			
Operating Temperature	-40°F to 122°F (-40°C to 50°C)			
Listings/Environment	UL, DLC Premium, IP65			
Warranty	5 Years warranty. Check maxlite.com/warranties for details			


*Default setting 30W, see Lumen Chart for lower wattages

Dimensions:


Round – Dome & Flat Top with or without Louvers

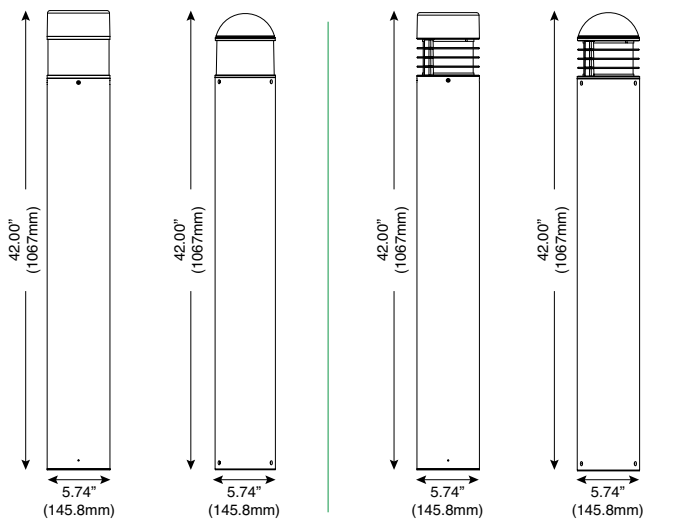

Square – Flat Top with or without Louvers

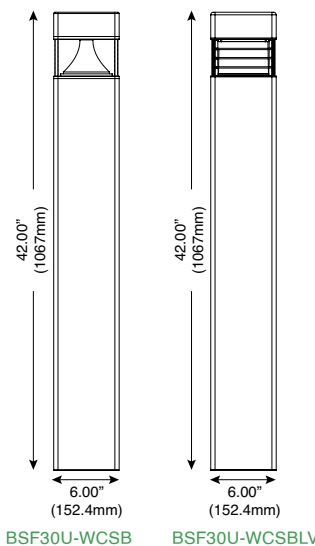

Single Stilt Leg & Three Stilt Leg

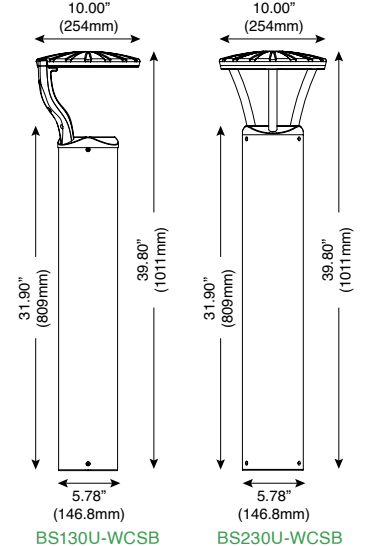

BRF30U-WCSB BRD30U-WCSB

BRF30U-WCSBLV BRD30U-WCSBLV

BSF30U-WCSB BSF30U-WCSBLV

BS130U-WCSB BS230U-WCSB