

# G4 PRO Emergency T8 (For On/Off Applications)

# ALEDDRA



3CCT Version



## Specifications

Color	3CCT (3500K, 4000K, 5000K)
Wattage	8W / 15W
Length	2-ft* / 4-ft
CRI	>80
Input Voltage	AC100-277V
Light Output	960lm (2ft), 1890lm (4ft)
LED Type	SMD2835
Power Factor	>0.92
Luminous Efficiency	>120 lm/W
Emergency Time	90 minutes
Light Output on Battery	420 lm at 3.5W
Battery Operating Temperature	50°F ~ 110°F
Rated Hours	50,000 hours
Warranty	5-year **

\*\* The 5-year warranty is provided under the assumption of performing no more than two 90-min battery discharge tests annually over five years. The warranty is void if performing more than ten 90-min battery discharge tests in five years.

## Ordering Information

Product Model #	Wattage	length
LLT-4-EM-T8-G4PRO-15W-3CCT	15W	4ft
LLT-2-EM-T8-G4PRO-8W-3CCT	8W	2ft

\*The 2-ft version is designed to meet UL924 requirements and is UL924-ready.


## Features

- 2-in-1 tube: regular T8 lighting and emergency lighting
- Fully automatic self-testing: 30-second test monthly and 90-minute test annually
- Fully automatic self-diagnosis with flashing indicator if the battery time drops below 90 minutes
- Features a pair of patented locking lampholders that secures the tube in place
- Manual testing button
- Built-in lithium batteries
- Controllable by wall switch
- Easily select from three different color temperatures (3500K, 4000K, 5000K)

## Product Compliance & Certifications:

- **UL924 certified**
- ETL certified for Type B (ballast bypass)
- 90 minutes battery time per industry standard

## Wiring Diagram

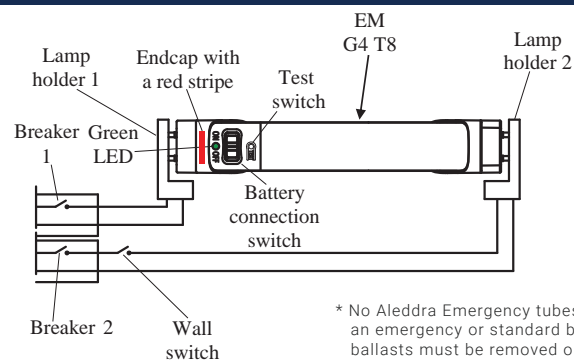

\* No Aleddra Emergency tubes can be used with an emergency or standard ballasts. The existing ballasts must be removed or by-passed.

- Red-labeled endcap wired L & N to a constant-on circuit for charging the battery.
- White endcap wired L & N to a switched circuit for turning on/off the lamp.

## Description

Aleddra's G4 PRO Emergency T8 lamp sets another industry standard as the first **UL924-certified** self-testing emergency LED tube. The PRO Series features a patented locking lampholder that secures the tube in place, meeting UL924 safety requirements by preventing removal without a tool. The lamp operates as an energy-efficient T8 during normal operation and can be turned on/off via a wall switch. During power outage, it will last over 90 minutes on battery. More importantly, the lamp will automatically self-test for 30 seconds monthly and for 90 minutes annually, thus meeting the emergency lighting audit requirements with no labor cost. Should any malfunction be detected during self-testing, such as insufficient battery capacity, the warning indicator on the lamp will flash and alert the team.