

# WALL PACK WP SERIES

# CONTRACTOR CHOICE

The Contractor Choice LED Forward Throw Wall Pack combines high-efficiency with versatile field-selectable controls. With 4-way wattage selection, 3-way color temperature, and 4-way beam angle adjustment, this fixture replaces up to 48 different HID outputs in a single SKU. Ideal for varied mounting heights and applications on the same commercial property.



## Features

- Includes built-in wattage selectable switch
  - WP-60W (24W – 36W – 48W – 60W)
  - WP-100W (40W – 60W – 80W – 100W)
  - WP-150W (60W – 90W – 120W – 150W)
- Includes built-in color selectable switch
  - CCT (3000K – 4000K – 5000K)
- Includes built-in beam angle selectable switch
  - Beam Angle (0° – 15° – 30° – 45°)
- Includes built-in photocell (cover cap to deactivate)
- Optional 90min 8W 900LM emergency battery backup
- Sealed die-cast aluminum housing
- UV-resistant polycarbonate lens
- Bronze finish
- Operating temperature of -40° to 104° F
- Wet location rated
- Universal 120–277V input voltage
- 50,000-hour rated life
- 5-year manufacturer limited warranty
- DLC Premium listed



## Order Code

Example: WP-60W-DDK-BA-PC-B

Fixture Type	Adjustable Wattage	CCT (Adj. Color Temp)	Beam Angle	Photocell	Emergency Battery Backup
WP (Wall Pack)	<b>60W</b> (24/36/48/60W) <b>100W</b> (40/60/80/100W) <b>150W</b> (60/90/120/150W)	<b>DDK</b> (3000K/4000K/5000K)	<b>BA</b> (0°/15°/30°/45°)	<b>PC</b> (Photocell)	<b>Blank</b> (No Backup) <b>B</b> (Battery Backup)

## Adjustable Lumen Output

WP-60W			WP-100W			WP-150W		
SETTING	WATTS	LUMENS	SETTING	WATTS	LUMENS	SETTING	WATTS	LUMENS
40%	24W	4,150	40%	40W	6,600	40%	60W	10,000
60%	36W	5,800	60%	60W	9,400	60%	90W	14,500
80%	48W	7,300	80%	80W	12,000	80%	120W	18,500
100%	60W	8,700	100%	100W	14,200	100%	150W	22,300

# STRUCTURE DESIGN

## Rugged Housing

Sealed die-cast aluminum housing with high-quality UV-resistant polycarbonate lens

## Watt, Color & Beam Selectable

Includes selectable switch to set lumen output and selectable color temperature (3000K/4000K/5000K).

## Photocell

Built-in photocell with cover cap to deactivate



## Emergency Battery

Optional emergency battery backup  
8W 900LM 90MIN

# FIXTURE FEATURES

## Switch-Controlled Wattage, Color & Beam Angle

Internal 3-in-1 selector switch adjusts wattage output (40/60/80/100%), color temperature (3000K/4000K/5000K), and beam angle (0°/15°/30°/45°) independently.

## On/Off Photocell

Includes cover cap to deactivate. Automatic dusk-to-dawn sensing ensures lights activate only when needed.

## Emergency Battery Backup (Optional)


8W output, 900 lumens, 90-minute runtime. Battery backup operating range: 50°F to 104°F.

## Universal Voltage & Dimming


Operates on 120–277V input. Standard 0–10V dimming driver compatible with most lighting control systems.

# DIMENSIONS

60W & 100W Models

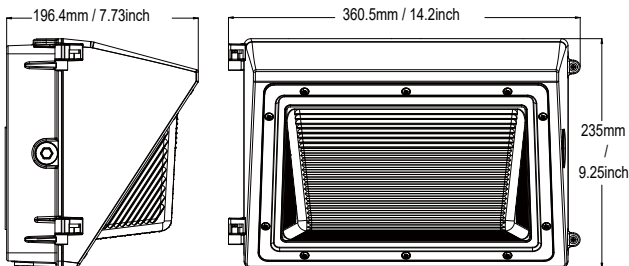

150W Model

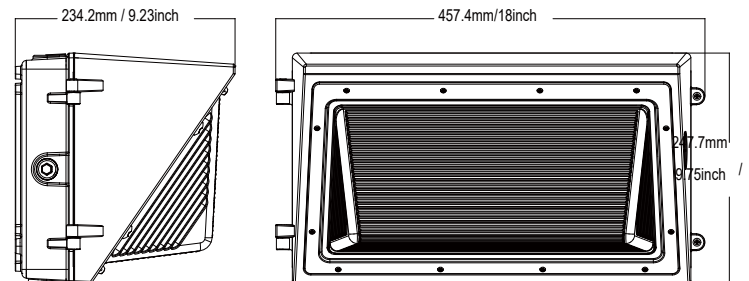

# SPECIFICATIONS

Specification	WP-60W	WP-100W	WP-150W
Ordering Code	WP-60W-DDK-BA-PC(-B)	WP-100W-DDK-BA-PC(-B)	WP-150W-DDK-BA-PC
Wattage (Selectable)	24 / 36 / 48 / 60W	40 / 60 / 80 / 100W	60 / 90 / 120 / 150W
Lumens @ 4000K (40%)	4,150 lm	6,600 lm	10,000 lm
Lumens @ 4000K (60%)	5,800 lm	9,400 lm	14,500 lm
Lumens @ 4000K (80%)	7,300 lm	12,000 lm	18,500 lm
Lumens @ 4000K (100%)	8,700 lm	14,200 lm	22,300 lm
CCT (Selectable)	3000K / 4000K / 5000K	3000K / 4000K / 5000K	3000K / 4000K / 5000K
Beam Angle (Selectable)	0°/15°/30°/45°	0°/15°/30°/45°	0°/15°/30°/45°
CRI	≥80	≥80	≥80
HID Equivalent	100/175/250W	175/250/400W	250/400/750W
Input Voltage	120–277V	120–277V	120–277V
Dimming	0–10V	0–10V	0–10V
Operating Temp.	-40° to 104° F	-40° to 104° F	-40° to 104° F
Rated Life	50,000 hours	50,000 hours	50,000 hours
Housing	Die-Cast Aluminum	Die-Cast Aluminum	Die-Cast Aluminum
Lens	UV-Resistant Polycarbonate	UV-Resistant Polycarbonate	UV-Resistant Polycarbonate
Finish	Bronze	Bronze	Bronze
Mounting	J-Box	J-Box	J-Box
Photocell	Yes (On/Off)	Yes (On/Off)	Yes (On/Off)
Emergency Battery	Optional (B suffix)	Optional (B suffix)	N/A
Wet Location	Yes	Yes	Yes
Width	14.2"	14.2"	18.0"
Height	9.25"	9.25"	9.75"
Depth	7.0"	7.0"	8.7"
DLC Listing	Premium	Premium	Premium
Warranty	5-Year Limited	5-Year Limited	5-Year Limited