

LED Luminaires

Mini Bullet Flood Series

- Compact adjustable bullet-style floodlight
- Field Adjustable CCT
- Integrated photocell with on/off switch
- J-Box or ground stake mounting
- Available in black, white, and bronze finishes

Specifications

Description

The LED Mini Bullet Flood Series is a compact, versatile floodlight ideal for landscape, accent, and small-area security lighting. Its streamlined design and adjustable head provide precise illumination for trees, pathways, signs, and building facades.

Selectable color temperature and an integrated photocell with on/off switch make the Mini Bullet easy to adapt to different applications. With J-Box and optional ground stake mounting, the Mini Bullet offers flexible installation for both residential and light commercial projects.

Performance

- 10W LED floodlight (1,100 lumens)
- Selectable Color Temperatures 3000K, 4000K, 5000K
- Up to 110 lumens per watt
- 80+ CRI
- 60° beam angle
- L70 Lumen Maintenance > 100,000 Hours
- 120-277VAC Input
- 5 Year Limited Warranty

Construction

- Die-cast Aluminum Housing
- Polycarbonate lens
- Adjustable head for precise aiming
- J-Box or optional ground stake mounting
- Available in black, white, and bronze finishes

DATE: _____ LOCATION: _____
TYPE: _____ PROJECT: _____
CATALOG #: _____



Applications

- Landscape lighting
- Trees, shrubs, and gardens
- Building facades and signage
- Pathways and walkways
- Accent lighting
- Small-area security lighting

Certifications

- cETLus, Wet location
- RoHS compliant
- IP65

Controls

- Integrated photocell
- On/off switch for photocell bypass

Mini Bullet Flood Series

Ordering Logic

Ordering Logic: Ex: MBUL-10-CS-U-BZ

Series	Lumens	CCT	Voltage	Finish
MBUL = Mini Bullet	10 = 1100	CS = Color Selectable 3000K/4000K/5000K	U = 120-277V	BL = Black BZ = Bronze WH = White

Ordering Information

Stock SKU's		
Product SKU	Product Code	Product Description
25590	MBUL-10-CS-U-BZ	Mini Bullet Flood, 10 Watt, CCT selectable 3000K/4000K/5000K, 120-277 VAC, Bronze Finish
25591	MBUL-10-CS-U-WH	Mini Bullet Flood, 10 Watt, CCT selectable 3000K/4000K/5000K, 120-277 VAC, White Finish
25592	MBUL-10-CS-U-BL	Mini Bullet Flood, 10 Watt, CCT selectable 3000K/4000K/5000K, 120-277 VAC, Black Finish

Accessories

Accessories		
Product SKU	Product Code	Product Description
25599	MBUL-GS-BZ	8in Ground stake Aluminum, Bronze finish
25600	MBUL-JB-BZ	Junction Box Housing Bronze with EPDM Form, 4 Plugs, 4 Screws and 1 Grounding Screw
25601	MBUL-JB-WH	Junction Box Housing White with EPDM Form, 4 Plugs, 4 Screws and 1 Grounding Screw
25602	MBUL-JB-BL	Junction Box Housing Black with EPDM Form, 4 Plugs, 4 Screws and 1 Grounding Screw
25603	MBUL-CV-BZ	Junction Box Cover Bronze with EPDM form, 2 Plugs, 4 Screws
25604	MBUL-CV-WH	Junction Box Cover White with EPDM form, 2 Plugs, 4 Screws
25605	MBUL-CV-BL	Junction Box Cover Black with EPDM form, 2 Plugs, 4 Screws

Mini Bullet Flood Series

Performance Table

Product Code	Wattage	3000K		4000K		5000K	
		Lumen Output (lm)	Efficacy (lm/W)	Lumen Output (lm)	Efficacy (lm/W)	Lumen Output (lm)	Efficacy (lm/W)
MBUL-10-CS-U-BZ	10	1000	100	1100	110	1050	105
MBUL-10-CS-U-WH							
MBUL-10-CS-U-BL							

Specifications Table

	MBUL-10-CS-U-BZ	MBUL-10-CS-U-BL	MBUL-10-CS-U-WH
Nominal Wattage	10W		
Delivered Lumens	1,100 LM @ 4000K		
Efficacy (lm/W)	110 @ 4000K		
Amperage	120VAC(0.09A) 277VAC(0.04A)		
Beam Angle	60 Degrees		
CCT	3000K/4000K/5000K Selectable		
CRI	>80 CRI		
L70 Lifetime (hrs)	>100,000 Hrs		
Voltage	120-277VAC		
Power Factor	>0.9		
Dimming	No Dimming		
Housing Material	Die-cast Aluminum with Powder Coated Finish		
Lens	Polycarbonate Lens		
Operating Temperature	-40°C to 50°C (-40°F to 122°F)		
Color Finish	Bronze	Black	White
Listings	cETLus, Wet Location, FCC		
Environment	IP 65		
Weight (lbs)	0.7		
Warranty	5 Years Standard		

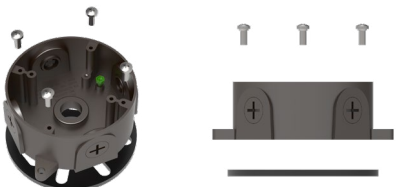
Mini Bullet Flood Series

Accessory Options

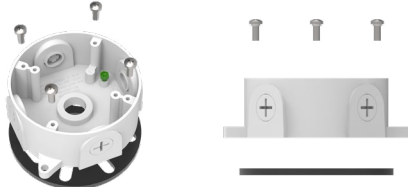
Ground Stake

Product SKU	Product Code	Description
25599	MBUL-GS-BZ	8in Ground stake Aluminum, Bronze finish
		

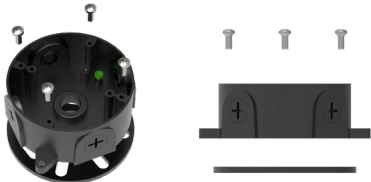
Ground Stake

Product SKU	Product Code	Description
25600	MBUL-JB-BZ	Junction Box Housing Bronze with EPDM Form, 4 Plugs, 4 Screws and 1 Grounding Screw
		


Ground Stake

Product SKU	Product Code	Description
25601	MBUL-JB-WH	Junction Box Housing White with EPDM Form, 4 Plugs, 4 Screws and 1 Grounding Screw
		

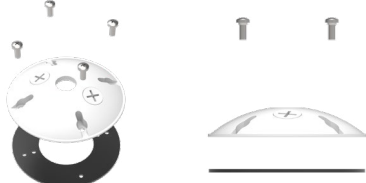
Ground Stake

Product SKU	Product Code	Description
25602	MBUL-JB-BL	Junction Box Housing Black with EPDM Form, 4 Plugs, 4 Screws and 1 Grounding Screw
		


Ground Stake

Product SKU	Product Code	Description
25603	MBUL-CV-BZ	Junction Box Cover Bronze with EPDM form, 2 Plugs, 4 Screws
		

Ground Stake

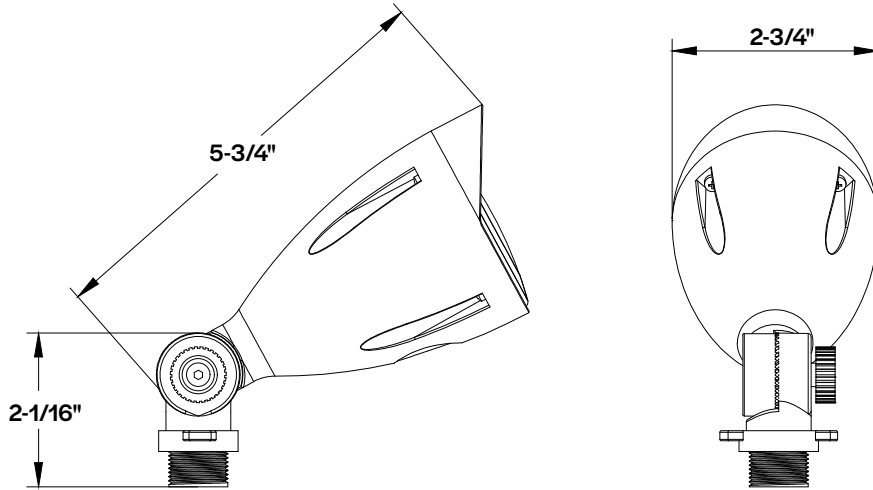
Product SKU	Product Code	Description
25604	MBUL-CV-WH	Junction Box Cover White with EPDM form, 2 Plugs, 4 Screws
		

Ground Stake

Product SKU	Product Code	Description
25605	MBUL-CV-BL	Junction Box Cover Black with EPDM form, 2 Plugs, 4 Screws
		

Mini Bullet Flood Series

Dimensions



Photometrics

*The below diagrams and zonal lumen summaries represent each fixture at highest wattage selection and at 5000K.
 For complete photometry/IES files, please contact the factory.

MBUL-10-CS-U-BZ - 5000K

Zonal Lumen Summary		
Zonal	Lumens	% Fixture
0° - 10°	98	8%
10° - 20°	233	18%
20° - 30°	265	20%
30° - 40°	264	20%
40° - 50°	247	19%
50° - 60°	137	11%
60° - 70°	28	2%
70° - 80°	11	1%
80° - 90°	4	0.3%
0° - 90°	1287	99%
0° - 180°	1294	100%

