

## BFD SECURITY BULLET FLOODLIGHT

### DESCRIPTION

naturaLED® Security Wall Lights double head bullet with motion sensor. Our security floodlights come in 20-watt to replace your existing incandescent up to 180-watt, saving up to 70% of energy. Super energy efficient and lasts up to 50,000+ hours average life. naturaLED® security lights are ideal solution for security lights, both residential, commercial and many other outdoor applications.



**Rated Life 50,000 Hours**  
**Warranty 5 Years**


### APPLICATIONS

Security, Accent, Residential, Outdoor, Wall Lighting

### FEATURES

- Energy Star Qualified
- Wet Location
- UL Listed
- ColorTemp: 3000K, 5000K
- Voltage: 120V
- Beam Angle: 70°
- CRI: 80
- Operating temperature: - 4°F - 104°F
- Up to 85% energy savings
- Instant on
- Lightweight
- No Mercury or lead
- Colors: Black, White
- 5 Year Warranty

### ACCESSORIES

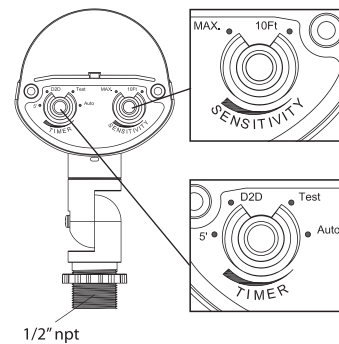

### SAMPLE NUMBER LED-FXBFD20/830/BK-SEN

STYLE	SERIES	FAMILY	WATTAGE	CRI/COLOR TEMP	COLOR	ACCESSORY
LED	FX	BFD	20	830	BK	SEN
LED Lighting	Fixture	Bullet Floodlight	20 Watt	CRI 80 3000K	Black (WH) White	Motion Sensor



# SECURITY BULLET FLOODLIGHT

WALL & SECURITY LUMINAIRES

## ORDERING

Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Voltage	Color/Sensor	Wet Location	Energy Star
20	<b>7082</b>	LED-FXBFD20/830/BK	3000K	1,400	120V	Black	•	•
20	<b>7083</b>	LED-FXBFD20/850/BK	5000K	1,400	120V	Black	•	•
20	<b>7672</b>	LED-FXBFD20/830/WH	3000K	1,400	120V	White	•	•
20	<b>7673</b>	LED-FXBFD20/850/WH	5000K	1,400	120V	White	•	•
20	<b>7030</b>	LED-FXBFD20/830/BK-SEN	3000K	1,400	120V	Black/ Sensor	•	•
20	<b>7031</b>	LED-FXBFD20/850/BK-SEN	5000K	1,400	120V	Black/ Sensor	•	•
20	<b>7066</b>	LED-FXBFD20/830/WH-SEN	3000K	1,400	120V	White/ Sensor	•	•
20	<b>7067</b>	LED-FXBFD20/850/WH-SEN	5000K	1,400	120V	White/ Sensor	•	•
20	<b>7032</b>	LED-FXSFD20/830/WH-SEN	3000K	1,400	120V	White/ Sensor	•	•
20	<b>7033</b>	LED-FXSFD20/850/WH-SEN	5000K	1,400	120V	White/ Sensor	•	•

## ACCESSORIES (Ordered Separately)


### Daylight Motion Sensor



P10118 SEN-ES-180NX3-2VR/BK  
(Security floodlight motion sensor)


## DIMENSIONS

20W (with Sensor)  
2.43-lbs

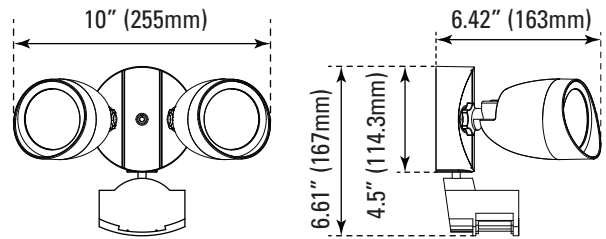

## PHOTOMETRICS CHART

20 Watt  
Energy Star

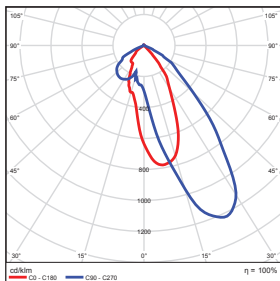

Center Beam fc	Beam Width
17.0ft	2.17 fc 6.8 ft 10.3 ft
34.0ft	0.54 fc 13.6 ft 20.5 ft
51.0ft	0.24 fc 20.5 ft 30.8 ft
68.0ft	0.14 fc 27.3 ft 41.1 ft
85.0ft	0.09 fc 34.1 ft 51.3 ft
102.0ft	0.06 fc 40.9 ft 61.6 ft

## PACKAGE

Case Qty 5 pcs

