MaxLite



Battery Operated Wireless Wall Switches



c-Max Overview

c-Max Network lighting controls features a patented plug-and-play interface that allows for easy field installation of low voltage nodes and sensors to create an affordable luminaire level lighting control solution. Sensors integrated with occupancy, daylight harvesting, and other control capabilities help achieve energy code compliance.

Features and Benefits

- Personal control allowing users to set and adjust dimming light levels for individual or a group of lights
- Easy commissioning via c-Max App (iOS and Android)
- · Ability to create and link three scenes (WNS5-W only)
- Battery powered 2x CR2032 batteries included for WNS5-W, 1x CR2032 battery included for WNS3-W and WNS1-W
- Surface or Junction box mounted
- 5 Year Warranty

Specifications


| OPERATING VOLTAGE | 3V (1x CR2032 for WNS1-W and WNS3-W) 3V (2x CR2032 for WNS5-W) | |
|--------------------------|---|--|
| FLAME RATING | UL 94 V-0 | |
| CONTROL TECHNOLOGY | Bluetooth | |
| WIRELESS STANDARD | BLE MESH | |
| PROGRAMMING | c-Max Mobile App (iOS and Android) | |
| CYBERSECURITY | UL1376 Gold Rating | |
| ENCRYPTION | AES 128-bit | |
| MESH RANGE | 100ft node-to-node and 50ft node-to-device (Commissioning) | |
| FCC | FCC ID: 2AZRDCMAX2021 | |
| OPERATING TEMPERATURE | 14°F to 113°F / -10°C to 45°C | |
| COLOR | White | |
| WEIGHT (NO BATTERY) | 2.1oz (60g) | |

Ordering Information

| MODEL NUMBER | DESCRIPTION | UPC | ORDER CODE |
|-----------------|--|--------------|---------------|
| WNS1-W | NETWORK CONTROLS (BLUETOOTH) 1 BUTTON WALL SWITCH (WHITE) | 767627038020 | 109112 |
| WNS3-W | NETWORK CONTROLS (BLUETOOTH) 3 BUTTON SWITCH (WHITE) | 767627038013 | 109111 |
| WNS5-W | NETWORK CONTROLS (BLUETOOTH) 5 BUTTON SWITCH (WHITE) | 767627030703 | 108392 |

Product Dimensions

WNS5-W, WNS3-W, WNS1-W

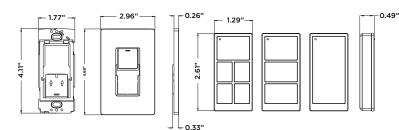



c-Max mobile App makes it easy to pair devices, create groups, set scenes/schedules, customize dimming levels, and adjust high trim based on application needs.

Visit <u>www.maxlite.com/cmax</u> for How-to-Videos and a comprehensive commissioning guide.









5-year standard warranty (further details available at www.maxlite.com/warranties)