

**51" UV Air Duct Disinfection 2-Lamp Fixture - UV-C - Destroys Airborne Bacteria & Viruses -
120V - 28.6W Total UV Output - Air Duct Mount
IND-HVAC-DTW-UVC-R1-SS-48-2L-120V**



This unit is Made In USA - Manufactured in Texas
IND-HVAC-DTW-UVC-R1-SS-48-2L-120V UV Air Duct Disinfection System

Lamp Technology: UV-C Fluorescent

Exterior Housing Dimensions: 8.00"H x 5-19/32"W x 2-7/8"D

Lamp Extension (into duct): 51"

Weight: -

Voltage: 120V AC, 50/60 Hz

Wattage: 40W Per Lamp

Total Watts: 160W

UV Output: 14.3W per lamp

Total UV Output: 57.2W

Irradiance (single lamp): 117 uW/cm² @ 1 meter

Expected Lifespan: 8,000+ Hours

UV Wavelength: 254nm peak

Lamp Base: G13 (Medium Bi-Pin)

Replacement Lamp: FRL-48-1X-T8-40W-UV-C

Beam Angle: 360°

Light Configuration: Flood

Amps: 0.83A @ 120V

Ambient Operating Temp Range: -

Materials: 304 Stainless Steel Enclosure

Indicator Lights: Operational Light (confirms on) and Replace Lamp (lamp no longer functional) indicator lamps

Mounting: Partial Internal Air Duct Mount

*****PLEASE NOTE: UV-C light can cause temporary or permanent loss of vision, and temporary acute redness or ulceration (mild to severe sunburn) to exposed skin. To prevent exposure, do not operate the device in any application that allows UV-C light to be visible during operation. NEVER LOOK DIRECTLY AT THE BULB OR DISINFECTING TARGET ZONE. DO NOT touch bulb with bare hands. The oils in your skin will damage the lamp. Fingerprints will result in reduced performance and significantly reduce the lifespan of the lamp unless they are removed with alcohol. Please read instruction manual for UV safety requirements before operating.*****

Ratings/Features

NRTL Listed to UL 508A

NRTL Listed to CSA C22.2 No. 14

T8 Bulb Shape

Short-wave Germicidal Light

Destroys Airborne Bacteria and Viruses

Non-Ozone Producing Germicidal UV Lamp

Special Orders - Requirements

Contact us for special requirements

Toll Free: 1-800-369-6671

Intl: 1-214-616-6180

Fax: 1-903-498-3364

E-mail: sales@larsonelectronics.com

This unit is Made In USA - Manufactured in Texas

The IND-HVAC-DTW-UVC-R1-SS-48-2L-120V from Larson Electronics is a Air Duct Disinfection System that works to disinfect air moving through a duct system via germicidal ultraviolet (UV) rays. This unit helps to control the spread of airborne cold and flu virus as well as other airborne transmitted disease. This anodized aluminum air duct disinfection system features a pair of 40 watt UV bulbs that each produce 14.3 watts (28.6W total) of UV output at a wavelength of 254nm. The IND-HVAC-DTW-UVC-R1-SS-48-

2L-120V is designed to be mounted inside an air duct and operates on 120 V AC current.

****Please note: This product produces UV light. Make sure to follow all safety guidelines and protocols found in the user manual. UVC light in the proper setting kills up to 99.9% of viruses, mold, spores and bacteria. [Click here to learn more about UVC and the corona virus](#)****

The IND-HVAC-DTW-UVC-R1-SS-48-2L-120V is a powerful sanitation solution for industrial sites and commercial facilities. Equipped with a pair of UVC fluorescent lamps, this system offers 28.6 total watts of UV output at a wavelength of 254nm. The lights have an expected lifespan of 8,000+ hours and emit a flood beam pattern. The IND-HVAC-DTW-UVC-R1-SS-48-2L-120V can be used continuously in air ducts such as those found in HVAC systems.

Operation: This UV air duct disinfection system projects ultraviolet rays inside the air duct it is mounted in. The air flowing through the duct that passes through the UV rays is then sanitized. Bacteria and viruses present in the air that passes through the UV rays produced by the fixture are destroyed. The air moving through the duct is constantly being purified as it flows through the UV rays being produced by the fixture.

Construction: The enclosure of the IND-HVAC-DTW-UVC-R1-SS-48-2L-120V is built from 304 stainless steel. In-Operation and Replace-Lamp indicator lamps allows for operators to check the status of the UV bulb(s) without removing the fixture from the air duct or being exposed to harmful UV radiation.

Mounting: The IND-HVAC-DTW-UVC-R1-SS-48-2L-120V is designed to be mounted inside an air duct. The system is mounted in a partial internal style with the bulb(s) being mounted inside of the air duct and the electronics mounted on the outside of the duct.


Note on Environment: Sunlight and visible light fixtures do not impact the effectiveness of the disinfecting on this UVC sanitation product. Metal halide, high pressure sodium, fluorescent, and LED light fixtures can be left on. The UV radiation emitted from this product is not disrupted by any type of lighting in the environment. Put simply, NO it DOES NOT need to be dark in the area you plan to disinfect. The UV radiation is harmful to the eyes and skin, and that is why you should not be in the area while it is in operation. Please see user manual for additional safety information.


Applications: This ultraviolet UV air duct disinfection system can be used to continuously disinfect air of mold, allergens, airborne bacteria, viruses, and germs. The IND-HVAC-DTW-UVC-R1-SS-48-2L-120V is ideal for use in restaurants, hospitals, clinics, laboratories, nursing homes, schools, food processing facilities, office buildings, conference rooms, universities, clean rooms, and many more. Larson Electronics is a manufacturer and as such can build stationary and portable transformer systems to your specifications. Although we carry several models of power distribution transformer systems, we can deliver custom ordered units almost as quickly as our prebuilt units. If this model does not meet your needs, please contact us at 1-800-369-6671 or sales@larsonelectronics.com to discuss your specific requirements.

Manufactured by Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671




Distributed by Bulbs.com
243 Stafford Street, Worcester, MA 01603
Phone: 888.455.2800

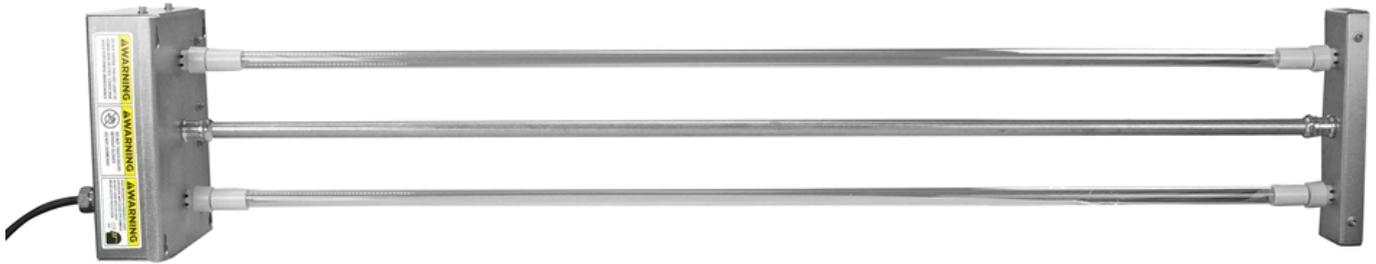

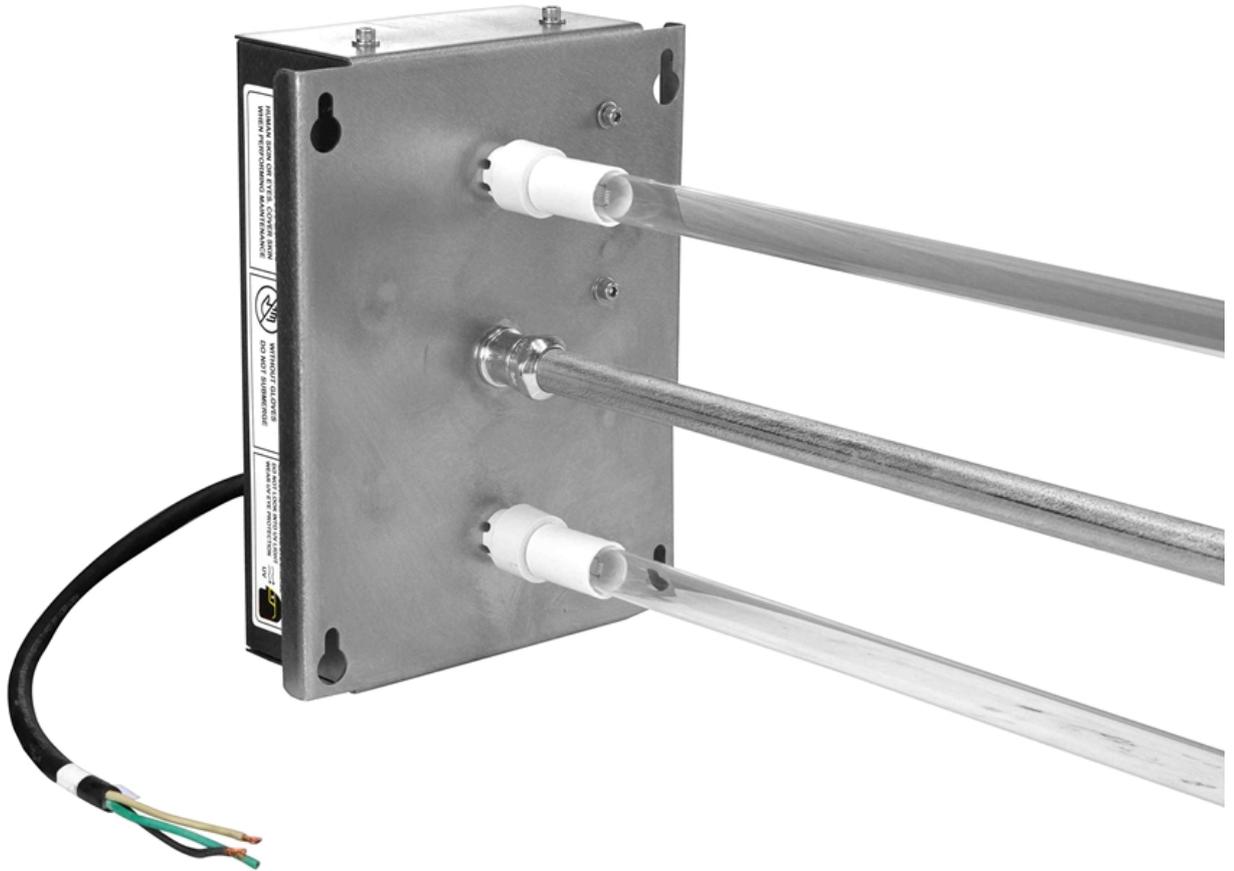



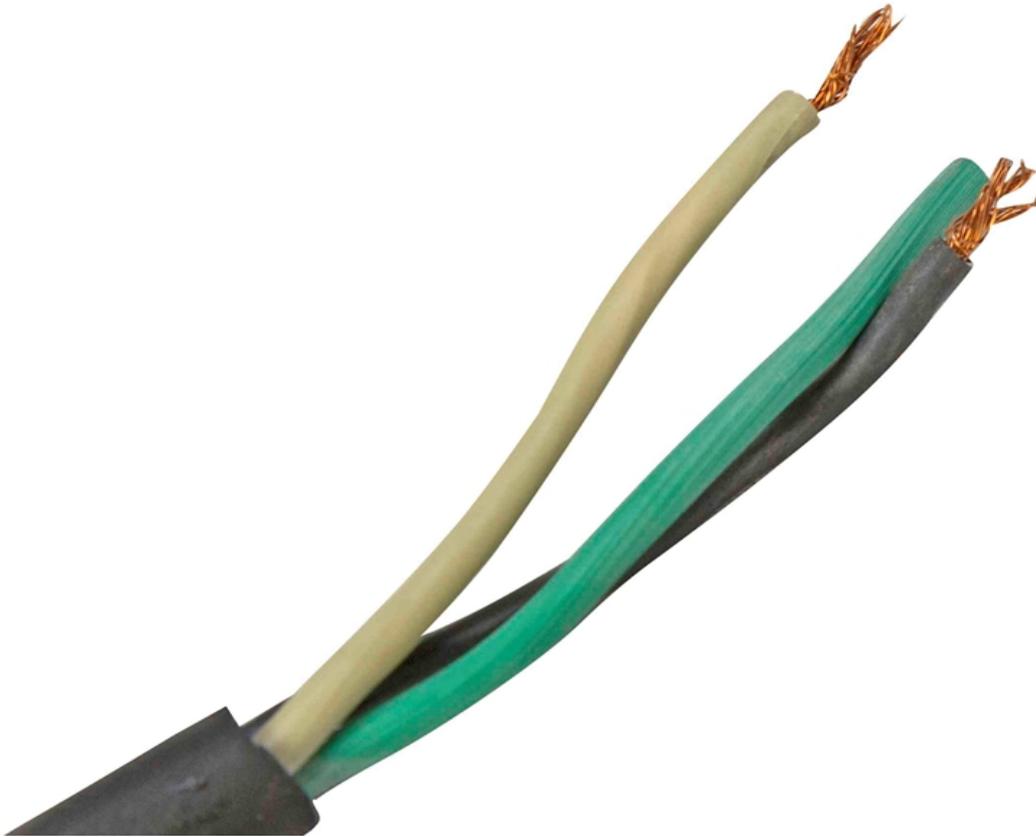

Warranty: 6 Months

Links (Click on the below items to view):

- [addpic1large](#)
- [addpic2large](#)
- [addpic3large](#)
- [addpic4large](#)
- [CatalogPage](#)
- [DimensionalDrawing](#)
- [large](#)
- [LightingFacts](#)
- [Manual](#)
- [medium](#)
- [MSDS](#)
- [SpectrumChart](#)
- [WiringDiagram](#)
- [HigResPic1](#)
- [HigResPic2](#)
- [HigResPic3](#)
- [HigResPic4](#)
- [HigResPic5](#)
- [HigResPic6](#)
- [HigResPic7](#)
- [HigResPic8](#)
- [HigResPic9](#)
- [Video1](#)
- [Video4](#)
- [CECCert](#)
- [Cert1](#)
- [EyeSafety](#)
- [NECCert](#)